BRQ-TD

TWIN-IMPELLER CENTRIFUGAL

60 Hz

BRQ-TD

WATER TRANSFER

01 TWIN IMPELLER
Double-impeller construction

02 DIRECT COUPLING
Motor and pump assembly

03 THREADED PORTS
Horizontal clean-water pumps

FLOW m³/h	HEAD m	MOTOR kW
0–27	22–160	1.1–22

Double-impeller centrifugal pumps with threaded connections and a direct-coupled motor, extending the pressure range of horizontal clean-water pumps.

APPLICATIONS

Water supply / Pressure boosting / Irrigation

FREQUENCY

60 Hz

BRQ-TD / TWIN-IMPELLER CENTRIFUGAL

Selection data

60 Hz / Performance range

Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-TD-25-140/11	1.1	3500	32 × 25	0–6	22–54
BRQ-TD-25-160/15-G	1.5	3500	32 × 25	0–8.4	30–58
BRQ-TD-40-210/55-G	5.5	3500	50 × 40	0–15	56–94
BRQ-TD-40-250/185-G	18.5	3500	50 × × 40	0–27	107–145
BRQ-TD-40-250/220-G	22	3500	50 × 40	0–27	122–160
BRQ-TD-50-180/75-G	7.5	3500	50 × 50	0–21	45–84
BRQ-TD-50-200/110-G	11	3500	50 × 50	0–27	69–105
BRQ-TD-50-250/185-G	18.5	3500	50 × 50	0–27	107–145
BRQ-TD-50-250/220-G	22	3500	50 × 50	0–27	122–160

BRQ-TD / TWIN-IMPELLER CENTRIFUGAL


Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm

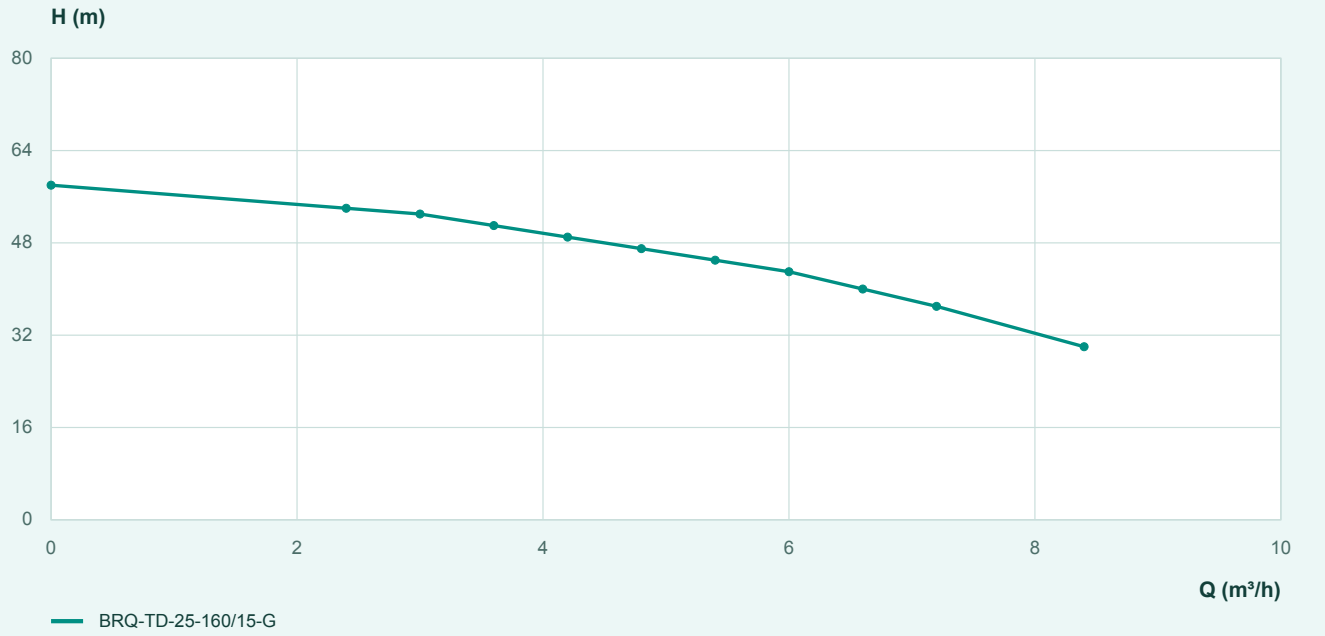

BRQ-TD / TWIN-IMPELLER CENTRIFUGAL


Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm

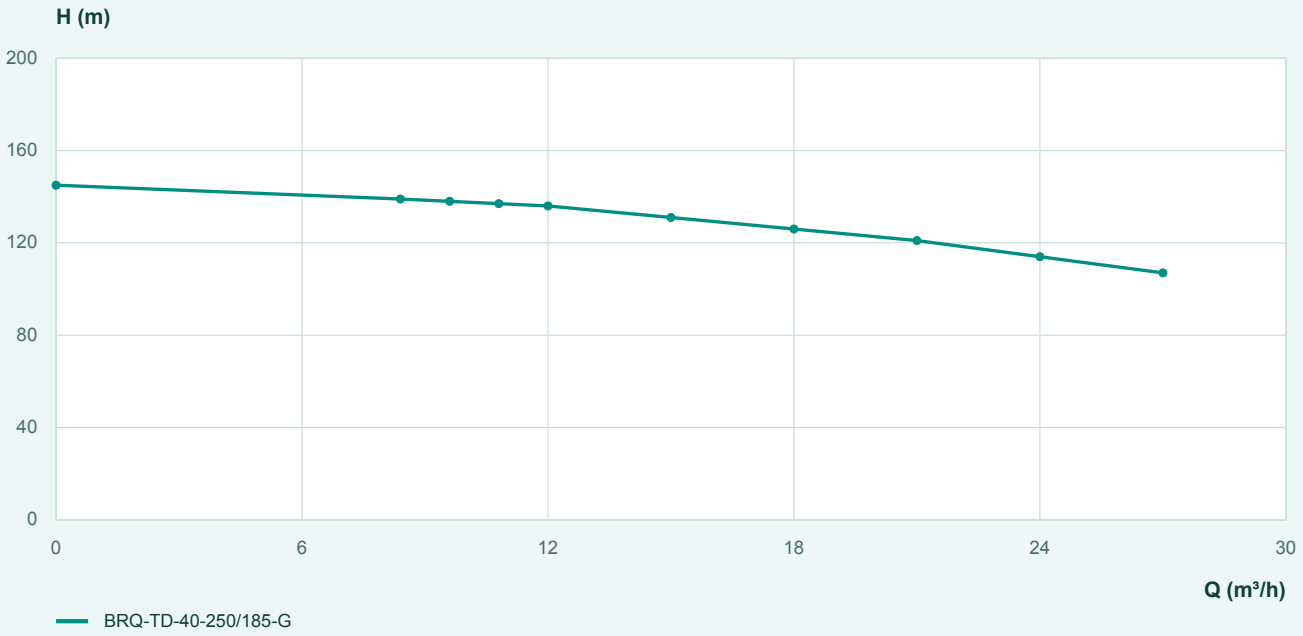


BRQ-TD / TWIN-IMPELLER CENTRIFUGAL


Performance characteristics

60 Hz / Flow and head

3500 rpm

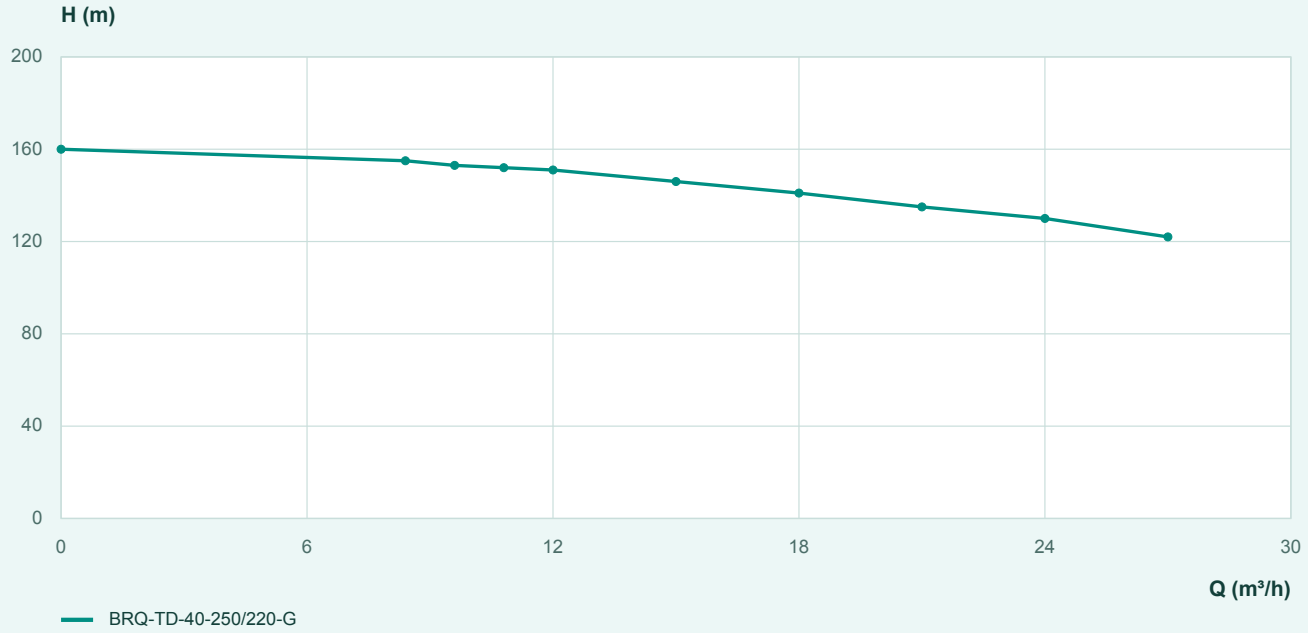

3500 rpm

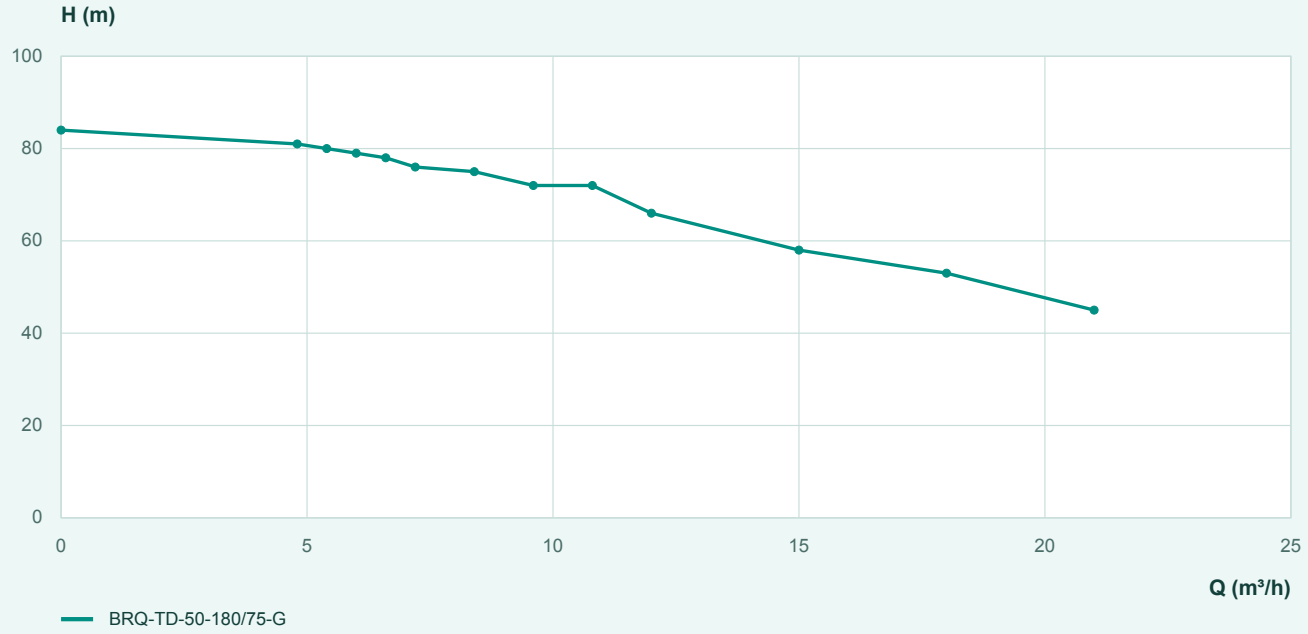


BRQ-TD / TWIN-IMPELLER CENTRIFUGAL

Performance characteristics

60 Hz / Flow and head

3500 rpm

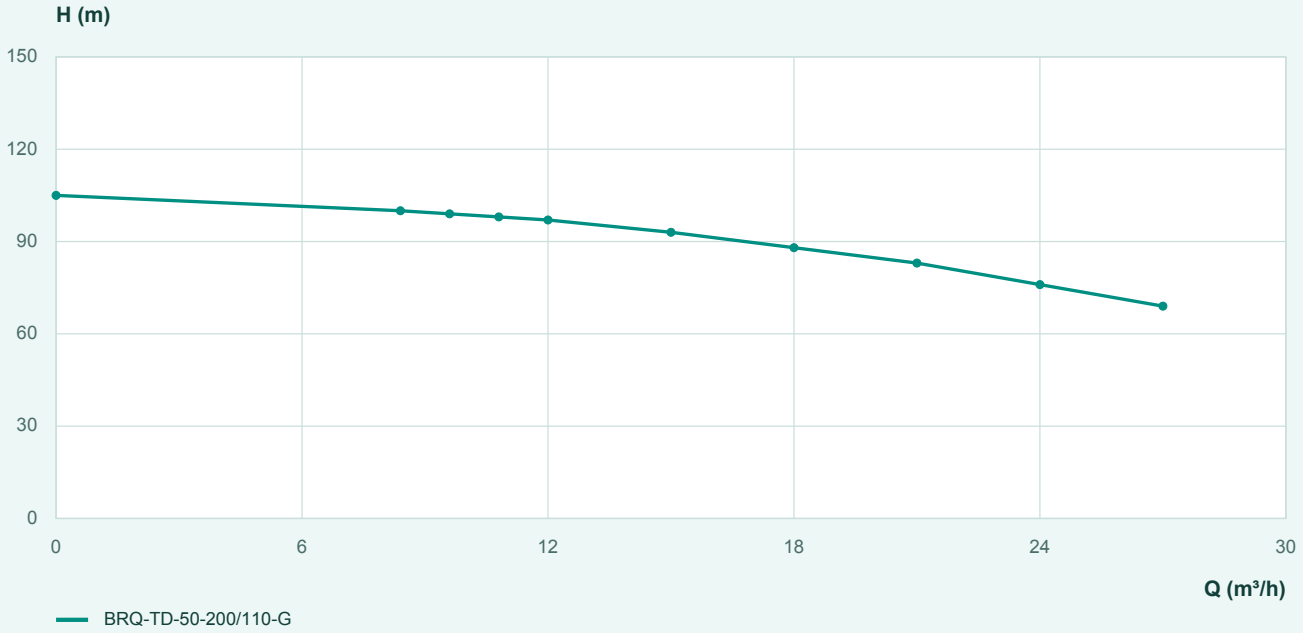

3500 rpm

