BRQ-VM

60 Hz

STAINLESS VERTICAL MULTISTAGE



01 MULTISTAGE
Vertical centrifugal design

02 INLINE CONNECTIONS
Ports on the same level

03 MATERIAL OPTIONS
Cast iron / stainless variants

Vertical multistage centrifugal pumps with suction and discharge connections on the same level. Cast-iron head and base or stainless-steel wetted construction provide two material configurations.

APPLICATIONS

Pressure boosting / Water treatment / Washing systems / HVAC circulation

FLOW m^3/h	HEAD m	MOTOR kW
0.6–240	6–248	0.37–110

IMPELLER AND SHAFT
AISI 304 stainless steel

STANDARD HEAD AND BASE
Cast iron

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Selection data

60 Hz / Performance range

Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-VM-1-2	0.37	3500	25 × 25	0.6–2	13–17.5
BRQ-VM-1-4	0.37	3500	25 × 25	0.6–2	26–35
BRQ-VM-1-6	0.55	3500	25 × 25	0.6–2	39–52
BRQ-VM-1-8	0.75	3500	25 × 25	0.6–2	53–68
BRQ-VM-1-10	1.1	3500	25 × 25	0.6–2	67–85
BRQ-VM-1-12	1.1	3500	25 × 25	0.6–2	79–103
BRQ-VM-1-13	1.1	3500	25 × 25	0.6–2	86–112
BRQ-VM-1-15	1.5	3500	25 × 25	0.6–2	99–127
BRQ-VM-1-17	1.5	3500	25 × 25	0.6–2	112–144
BRQ-VM-1-19	2.2	3500	25 × 25	0.6–2	124–160
BRQ-VM-1-21	2.2	3500	25 × 25	0.6–2	138–177
BRQ-VM-1-23	2.2	3500	25 × 25	0.6–2	152–193
BRQ-VM-1-25	3	3500	25 × 25	0.6–2	164–210
BRQ-VM-2-2	0.55	3500	25 × 25	1–4.5	9–26
BRQ-VM-2-4	1.1	3500	25 × 25	1–4.5	20–52
BRQ-VM-2-5	1.1	3500	25 × 25	1–4.5	25–65
BRQ-VM-2-6	1.1	3500	25 × 25	1–4.5	30–78
BRQ-VM-2-7	1.5	3500	25 × 25	1–4.5	35–91
BRQ-VM-2-9	2.2	3500	25 × 25	1–4.5	45–117
BRQ-VM-2-13	3	3500	25 × 25	1–4.5	66–171
BRQ-VM-2-15	3	3500	25 × 25	1–4.5	77–195
BRQ-VM-2-18	4	3500	25 × 25	1–4.5	94–234
BRQ-VM-3-5	0.75	3500	25 × 25	1.5–5	23–44
BRQ-VM-3-6	1.1	3500	25 × 25	1.5–5	27–51
BRQ-VM-3-7U	1.1	3500	25 × 25	1.5–5	31–61
BRQ-VM-3-8	1.1	3500	25 × 25	1.5–5	35–70
BRQ-VM-3-9	1.5	3500	25 × 25	1.5–5	40–78

Selection data

60 Hz / Performance range

Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-VM-3-12	2.2	3500	25 × 25	1.5–5	52–104
BRQ-VM-3-13	2.2	3500	25 × 25	1.5–5	57–112
BRQ-VM-3-15	2.2	3500	25 × 25	1.5–5	65–129
BRQ-VM-3-17	2.2	3500	25 × 25	1.5–5	74–147
BRQ-VM-3-19	3	3500	25 × 25	1.5–5	82–165
BRQ-VM-3-23	3	3500	25 × 25	1.5–5	98–200
BRQ-VM-3-25	4	3500	25 × 25	1.5–5	108–217
BRQ-VM-4-4	1.5	3500	32 × 32	2.5–8	31–52
BRQ-VM-4-5	2.2	3500	32 × 32	2.5–8	39–65
BRQ-VM-4-6	2.2	3500	32 × 32	2.5–8	47–78
BRQ-VM-4-7	3	3500	32 × 32	2.5–8	55–92
BRQ-VM-4-10	4	3500	32 × 32	2.5–8	80–130
BRQ-VM-4-12	4	3500	32 × 32	2.5–8	96–156
BRQ-VM-4-14	5.5	3500	32 × 32	2.5–8	112–182
BRQ-VM-4-16	5.5	3500	32 × 32	2.5–8	128–207
BRQ-VM-5-4	1.1	3500	32 × 32	3–8	20–35
BRQ-VM-5-6	1.5	3500	32 × 32	3–8	33–53.5
BRQ-VM-5-8	2.2	3500	32 × 32	3–8	48–72.5
BRQ-VM-5-11	3	3500	32 × 32	3–8	66–100.5
BRQ-VM-5-14	4	3500	32 × 32	3–8	88–128
BRQ-VM-5-16	4	3500	32 × 32	3–8	102–147
BRQ-VM-5-17	4	3500	32 × 32	3–8	105–156
BRQ-VM-5-18	5.5	3500	32 × 32	3–8	112.5–165
BRQ-VM-5-20	5.5	3500	32 × 32	3–8	125–183
BRQ-VM-5-22	5.5	3500	32 × 32	3–8	136–202
BRQ-VM-5-24	7.5	3500	32 × 32	3–8	150–220
BRQ-VM-8-1	0.75	3500	40 × 40	7–14	9–13

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Selection data

60 Hz / Performance range

Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-VM-8-3	2.2	3500	40 × 40	7–14	28–41
BRQ-VM-8-5	3	3500	40 × 40	7–14	47–70
BRQ-VM-8-8	5.5	3500	40 × 40	7–14	75–115
BRQ-VM-8-10	7.5	3500	40 × 40	7–14	95–145
BRQ-VM-10-1	0.75	3500	40 × 40	7–15	6–13.5
BRQ-VM-10-3	2.2	3500	40 × 40	7–15	25–42
BRQ-VM-10-4	3	3500	40 × 40	7–15	34–57
BRQ-VM-10-5	3	3500	40 × 40	7–15	43–71
BRQ-VM-10-7	5.5	3500	40 × 40	7–15	61–100
BRQ-VM-10-8	5.5	3500	40 × 40	7–15	70–114
BRQ-VM-10-9	5.5	3500	40 × 40	7–15	79–128
BRQ-VM-10-10	7.5	3500	40 × 40	7–15	89–143
BRQ-VM-10-12	7.5	3500	40 × 40	7–15	107–172
BRQ-VM-10-16	11	3500	40 × 40	7–15	143–230
BRQ-VM-10-17	11	3500	40 × 40	7–15	152–245
BRQ-VM-12-3	4	3500	50 × 50	7–19	31–52.5
BRQ-VM-12-6	7.5	3500	50 × 50	7–19	61–107
BRQ-VM-12-7	7.5	3500	50 × 50	7–19	71–124
BRQ-VM-12-12	15	3500	50 × 50	7–19	125–213
BRQ-VM-15-2	3	3500	50 × 50	9–26	19.5–38
BRQ-VM-15-3	4	3500	50 × 50	9–26	34–58
BRQ-VM-15-4	5.5	3500	50 × 50	9–26	50.5–79
BRQ-VM-15-11	18.5	3500	50 × 50	9–26	146.5–218
BRQ-VM-15-12	18.5	3500	50 × 50	9–26	160–238
BRQ-VM-16-1	2.2	3500	50 × 50	10–26	11–19
BRQ-VM-16-2	4	3500	50 × 50	10–26	24–38
BRQ-VM-16-4	7.5	3500	50 × 50	10–26	49–76

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Selection data

60 Hz / Performance range

Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-VM-16-6	11	3500	50 × 50	10–26	75–115
BRQ-VM-16-7	15	3500	50 × 50	10–26	88–135
BRQ-VM-16-8	15	3500	50 × 50	10–26	101–155
BRQ-VM-16-10	18.5	3500	50 × 50	10–26	127–197
BRQ-VM-20-1	2.2	3500	50 × 50	12–34	8.5–19
BRQ-VM-20-3	5.5	3500	50 × 50	12–34	33–58
BRQ-VM-20-4	7.5	3500	50 × 50	12–34	45–78
BRQ-VM-20-6	11	3500	50 × 50	12–34	70–118
BRQ-VM-20-8	15	3500	50 × 50	12–34	96–158
BRQ-VM-20-10	18.5	3500	50 × 50	12–34	122–198
BRQ-VM-32-10-1	3	3500	65 × 65	20–48	7–20
BRQ-VM-32-20-2	5.5	3500	65 × 65	20–48	17–41
BRQ-VM-32-30-2	7.5	3500	65 × 65	20–48	31–67
BRQ-VM-32-40	15	3500	65 × 65	20–48	55–104
BRQ-VM-32-60	18.5	3500	65 × 65	20–48	81–155
BRQ-VM-32-60-2	18.5	3500	65 × 65	20–48	74–145
BRQ-VM-32-70	22	3500	65 × 65	20–48	97–182
BRQ-VM-32-80	30	3500	65 × 65	20–48	111–208
BRQ-VM-32-80-2	22	3500	65 × 65	20–48	102–196
BRQ-VM-32-90	30	3500	65 × 65	20–48	127–234
BRQ-VM-32-90-2	30	3500	65 × 65	20–48	117–223
BRQ-VM-32-100-2	30	3500	65 × 65	20–48	133–248
BRQ-VM-45-20	15	3500	80 × 80	30–65	44–69
BRQ-VM-45-30	18.5	3500	80 × 80	30–65	68–102
BRQ-VM-45-30-2	18.5	3500	80 × 80	30–65	55–90
BRQ-VM-45-40	30	3500	80 × 80	30–65	89–136
BRQ-VM-45-40-2	22	3500	80 × 80	30–65	78–125

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Selection data

60 Hz / Performance range

Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-VM-45-50	30	3500	80 × 80	30–65	112–171
BRQ-VM-45-50-2	30	3500	80 × 80	30–65	99–159
BRQ-VM-45-60-2	37	3500	80 × 80	30–65	122–194
BRQ-VM-45-70	45	3500	80 × 80	30–65	157–239
BRQ-VM-45-70-2	45	3500	80 × 80	30–65	144–227
BRQ-VM-64-10	11	3500	100 × 100	40–100	21–37
BRQ-VM-64-20	22	3500	100 × 100	40–100	42–74
BRQ-VM-64-40	45	3500	100 × 100	40–100	86–152
BRQ-VM-64-40-2	37	3500	100 × 100	40–100	66–130
BRQ-VM-64-50-2	45	3500	100 × 100	40–100	91–172
BRQ-VM-90-10	15	3500	100 × 100	60–130	18–36
BRQ-VM-90-20	30	3500	100 × 100	60–130	44–76
BRQ-VM-90-20-2	18.5	3500	100 × 100	60–130	22–59
BRQ-VM-90-30	45	3500	100 × 100	60–130	69–116
BRQ-VM-90-30-1	37	3500	100 × 100	60–130	56–108
BRQ-VM-120-10	18.5	3500	125 × 125	60–160	24.4–30.8
BRQ-VM-120-20	37	3500	125 × 125	60–160	54.6–66.3
BRQ-VM-120-20-1	30	3500	125 × 125	60–160	45–58.3
BRQ-VM-120-20-2	30	3500	125 × 125	60–160	38.5–51.5
BRQ-VM-120-30	55	3500	125 × 125	60–160	82.7–100.3
BRQ-VM-120-40	75	3500	125 × 125	60–160	109.5–134
BRQ-VM-120-40-1	75	3500	125 × 125	60–160	103–126
BRQ-VM-120-40-2	75	3500	125 × 125	60–160	93–116
BRQ-VM-120-50-2	75	3500	125 × 125	60–160	122–152
BRQ-VM-150-10	22	3500	125 × 125	80–180	27–35
BRQ-VM-150-10-1	15	3500	125 × 125	80–180	18–26.5
BRQ-VM-150-20	45	3500	125 × 125	80–180	59–75.5

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Selection data

60 Hz / Performance range


Model	Motor kW	Speed rpm	DN mm	Q range m³/h	H range m
BRQ-VM-150-20-2	30	3500	125 × 125	80–180	43–57
BRQ-VM-150-40-2	75	3500	125 × 125	80–180	102.5–133
BRQ-VM-200-10-A	37	3500	150 × 150	100–240	34.5–43
BRQ-VM-200-20-B	75	3500	150 × 150	100–240	79–95.5
BRQ-VM-200-30-2A	110	3500	150 × 150	100–240	120–145
BRQ-VM-200-30-2B	110	3500	150 × 150	100–240	108.5–135
BRQ-VM-200-30-A-B	110	3500	150 × 150	100–240	113.5–139

BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

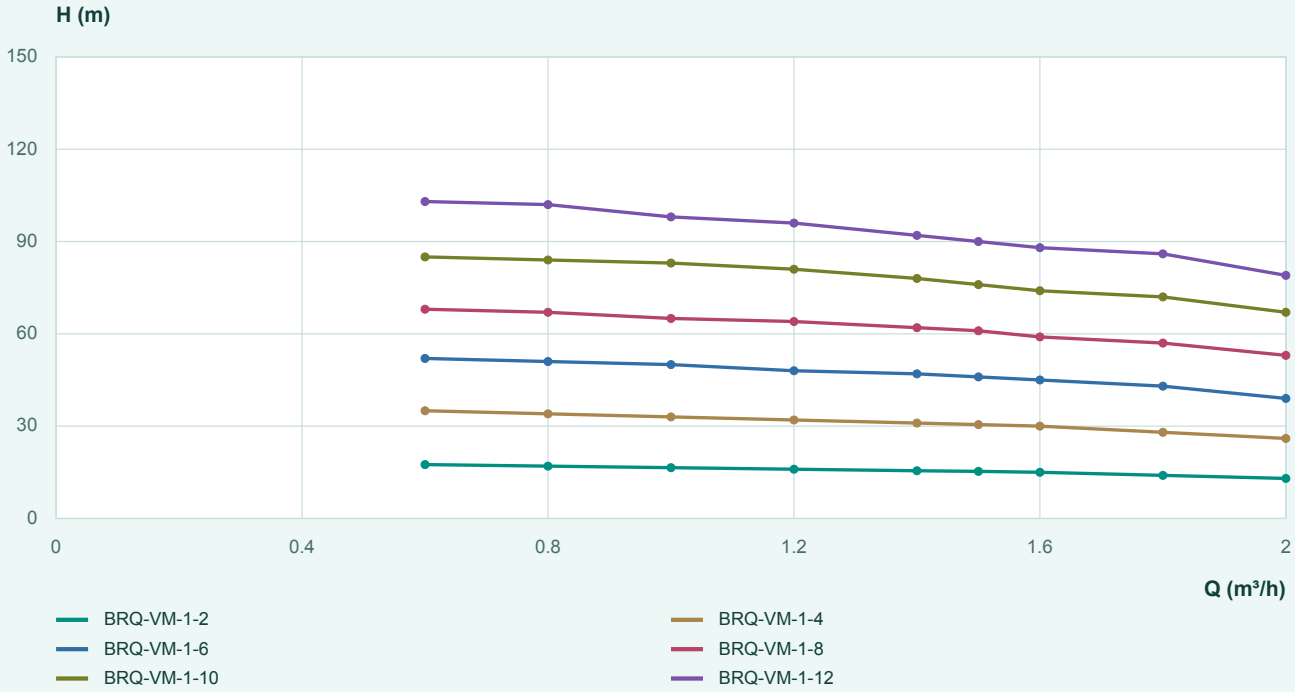

3500 rpm

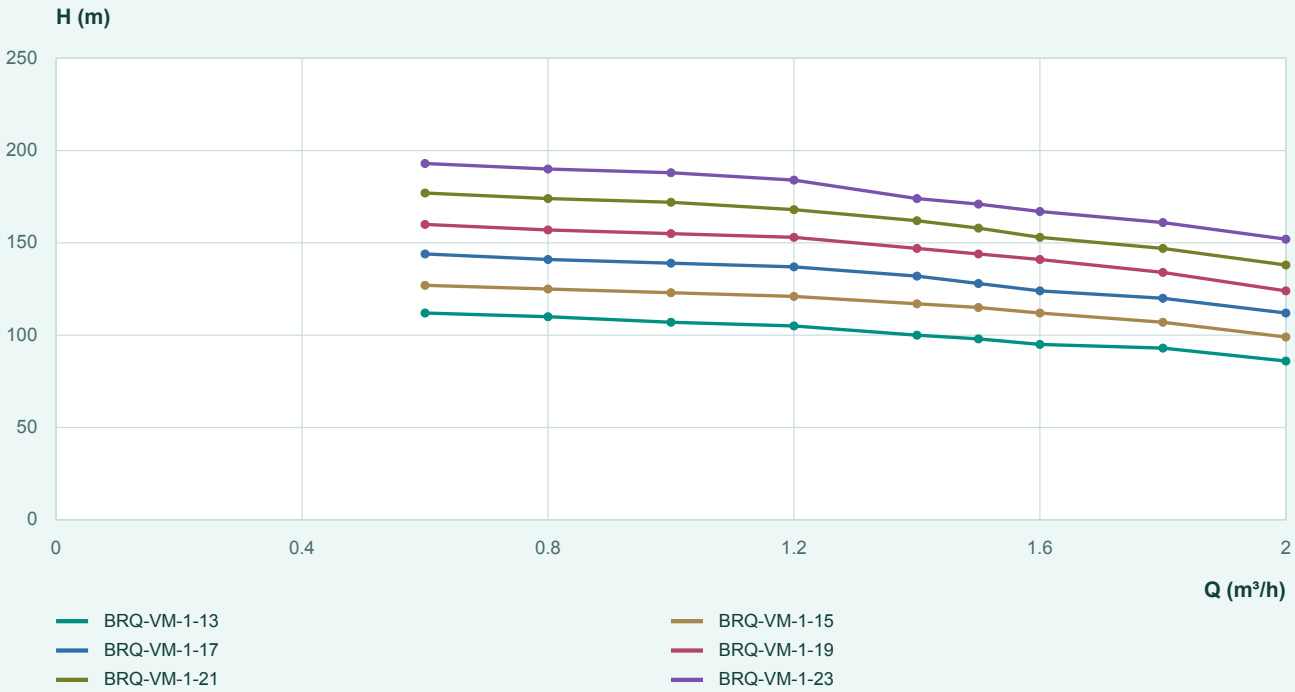


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

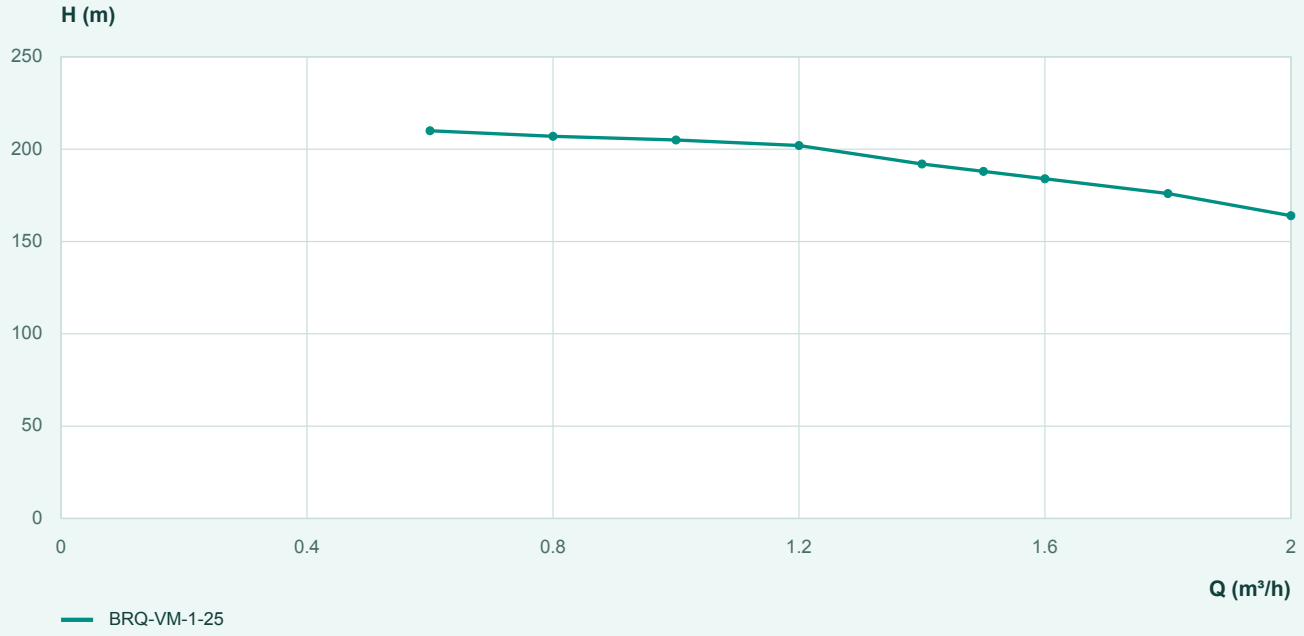

3500 rpm

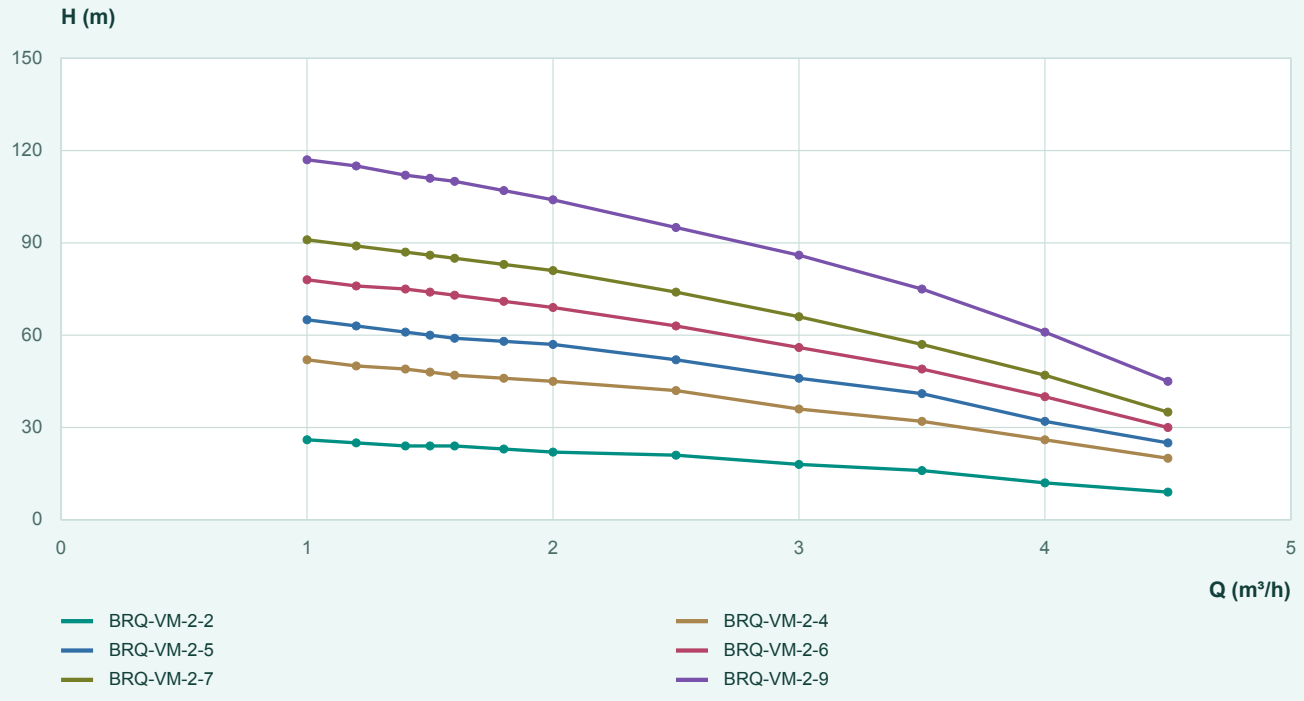


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

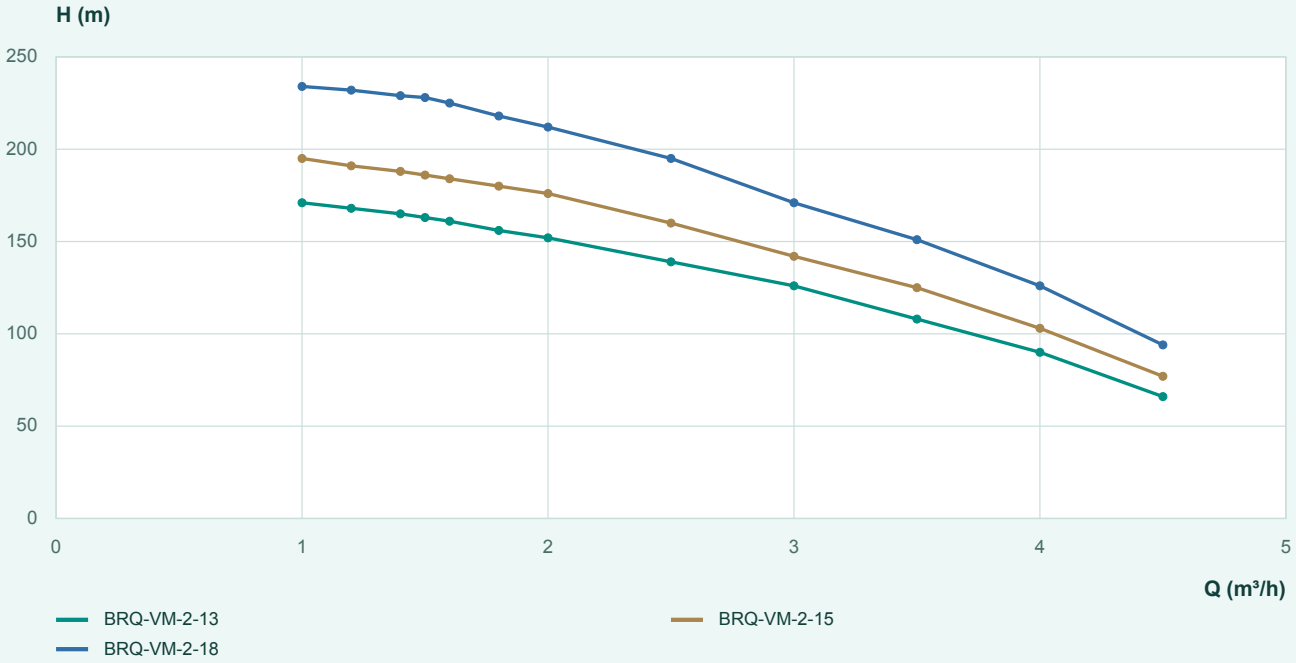

3500 rpm

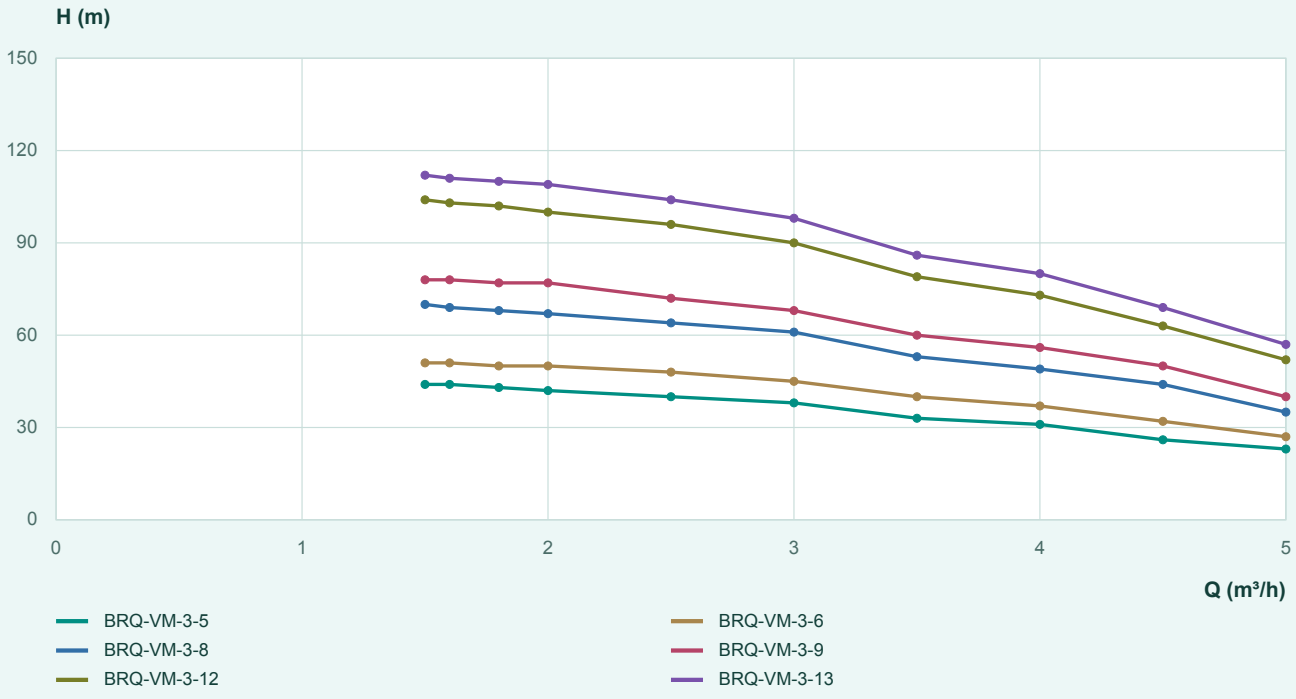


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics

60 Hz / Flow and head

3500 rpm

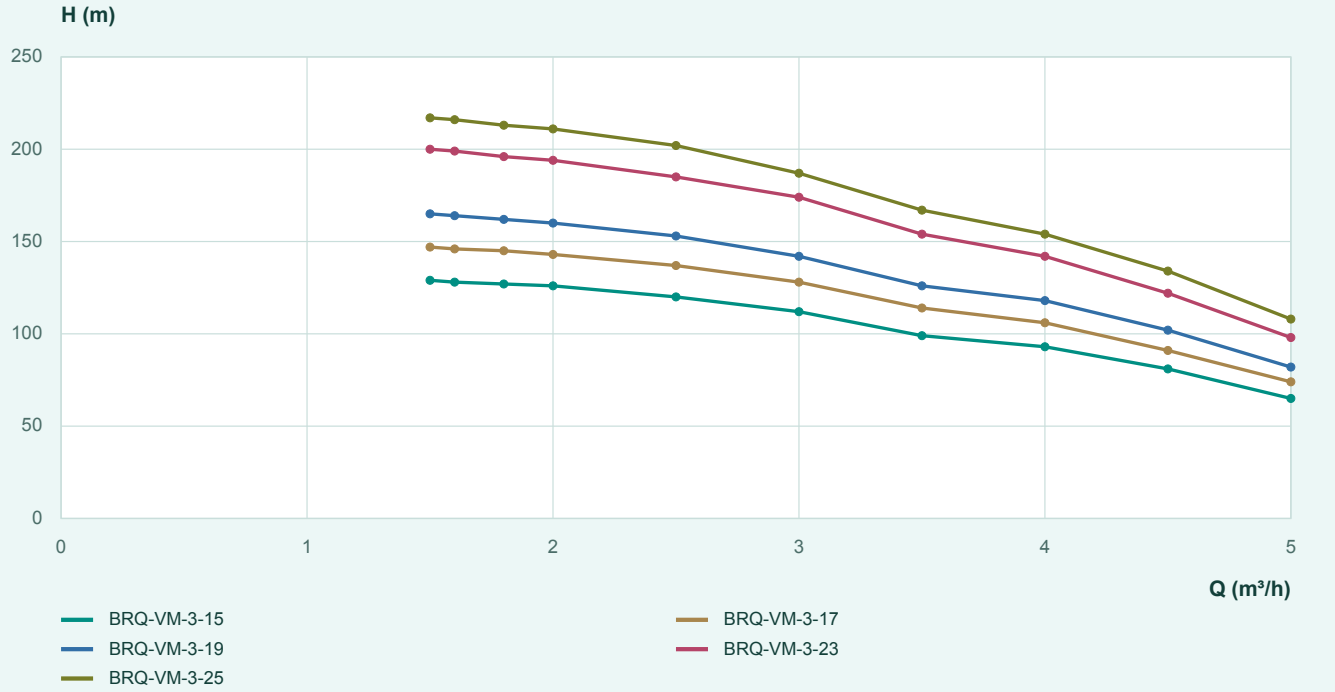

3500 rpm




BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

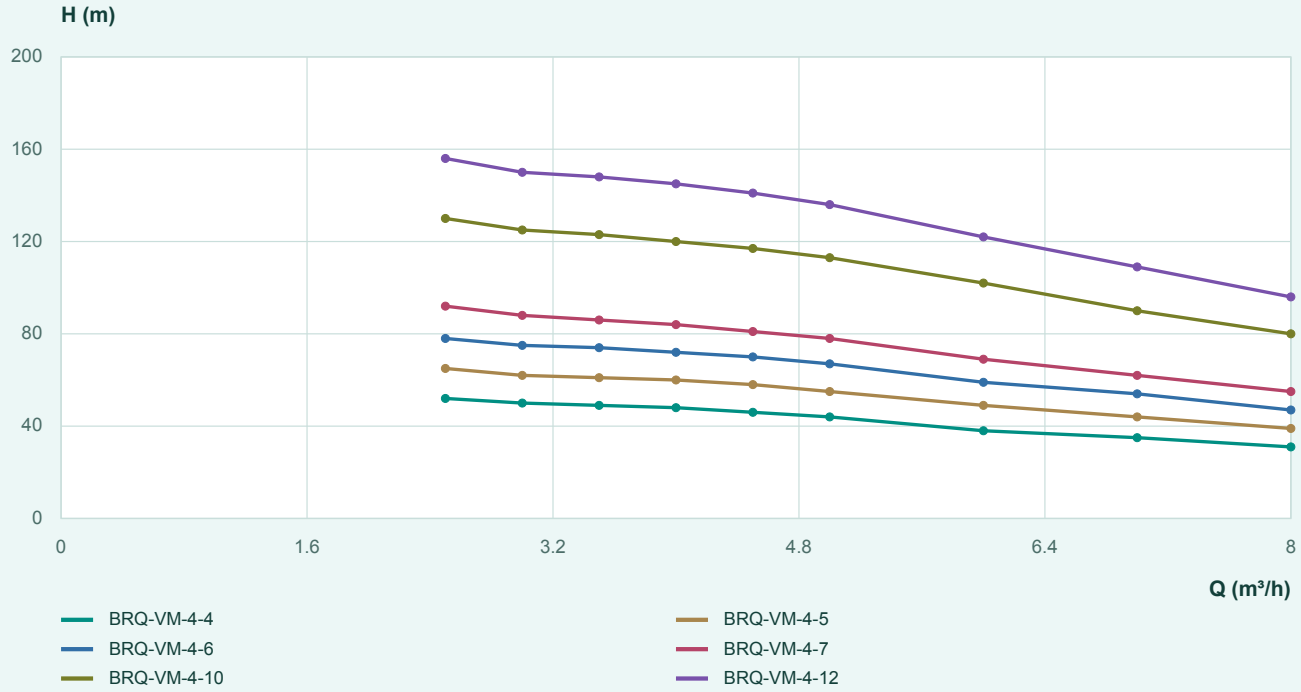

3500 rpm

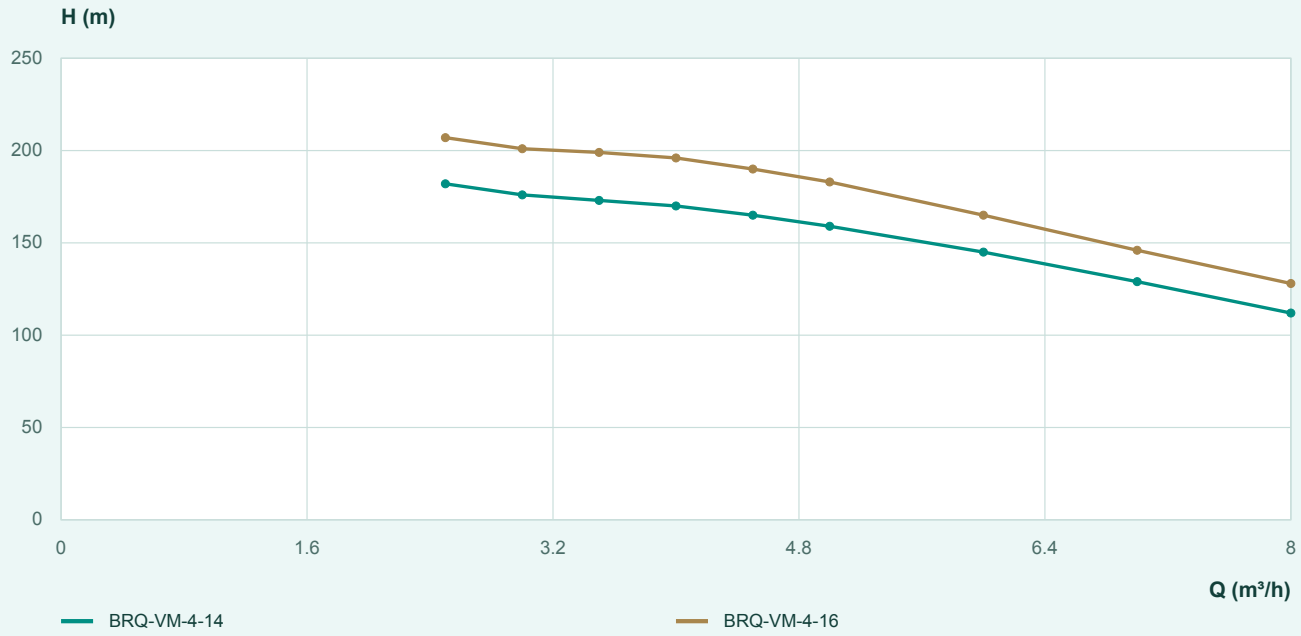


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

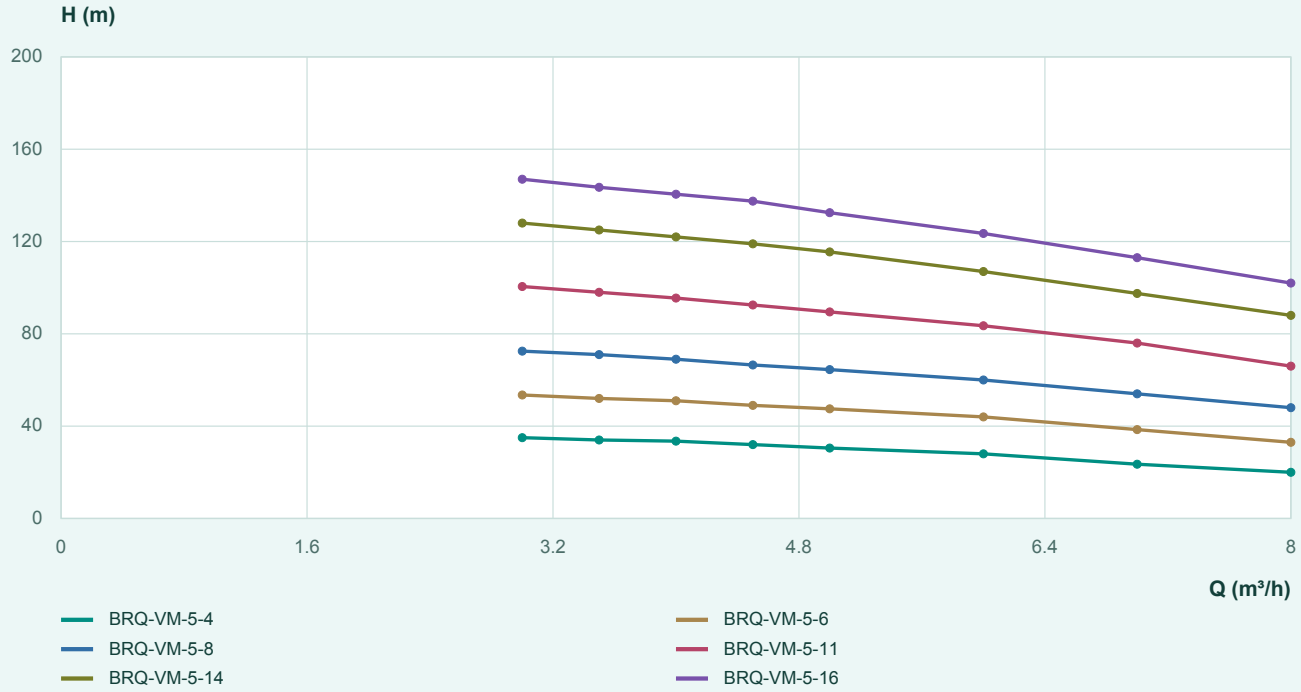

3500 rpm

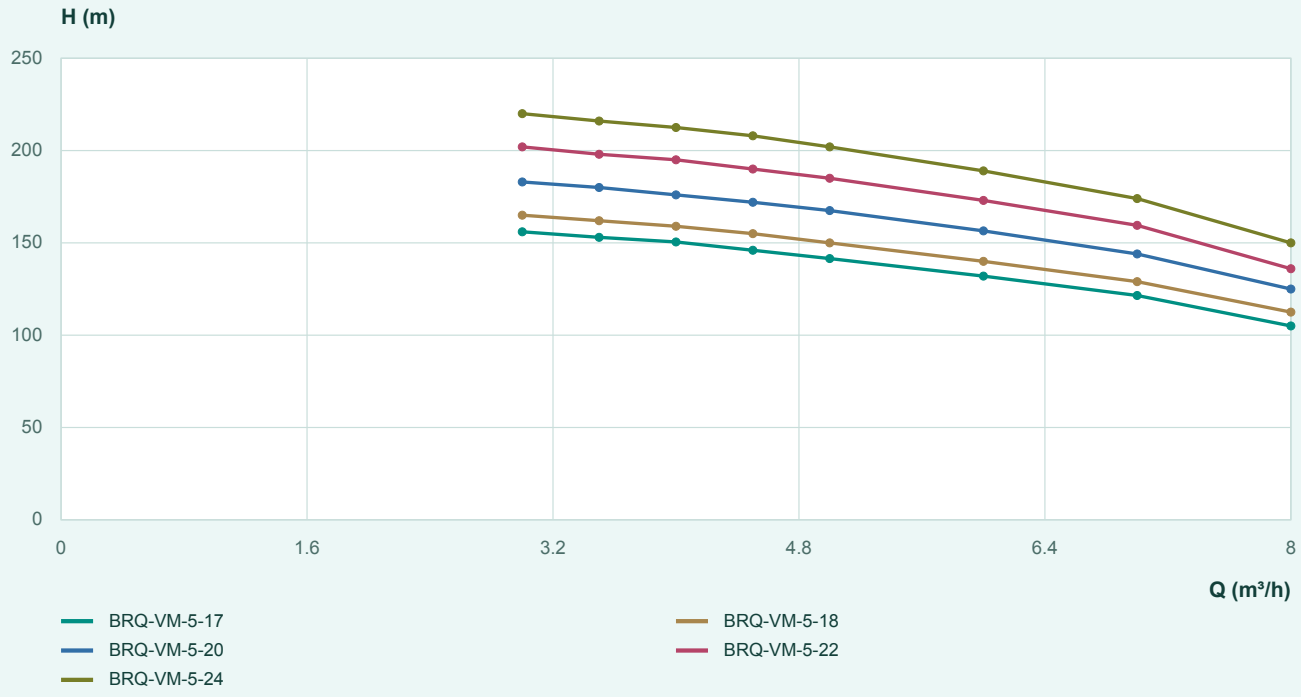


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

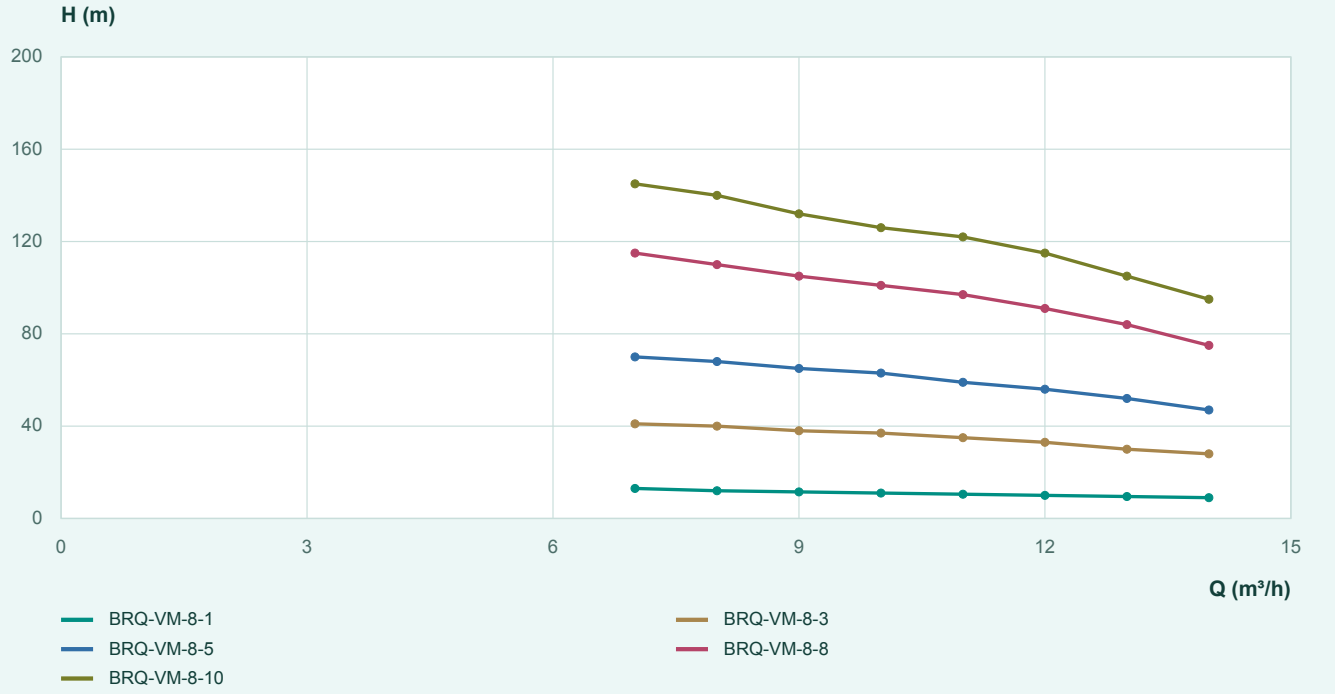

3500 rpm

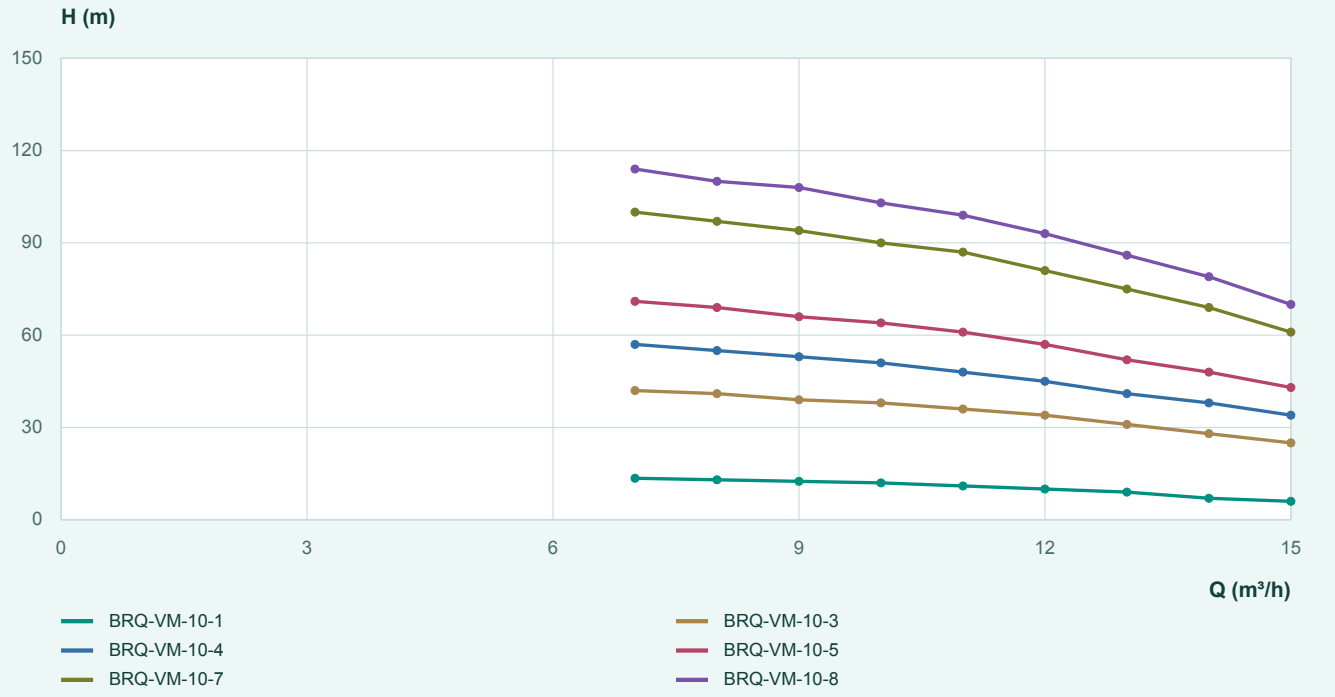


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

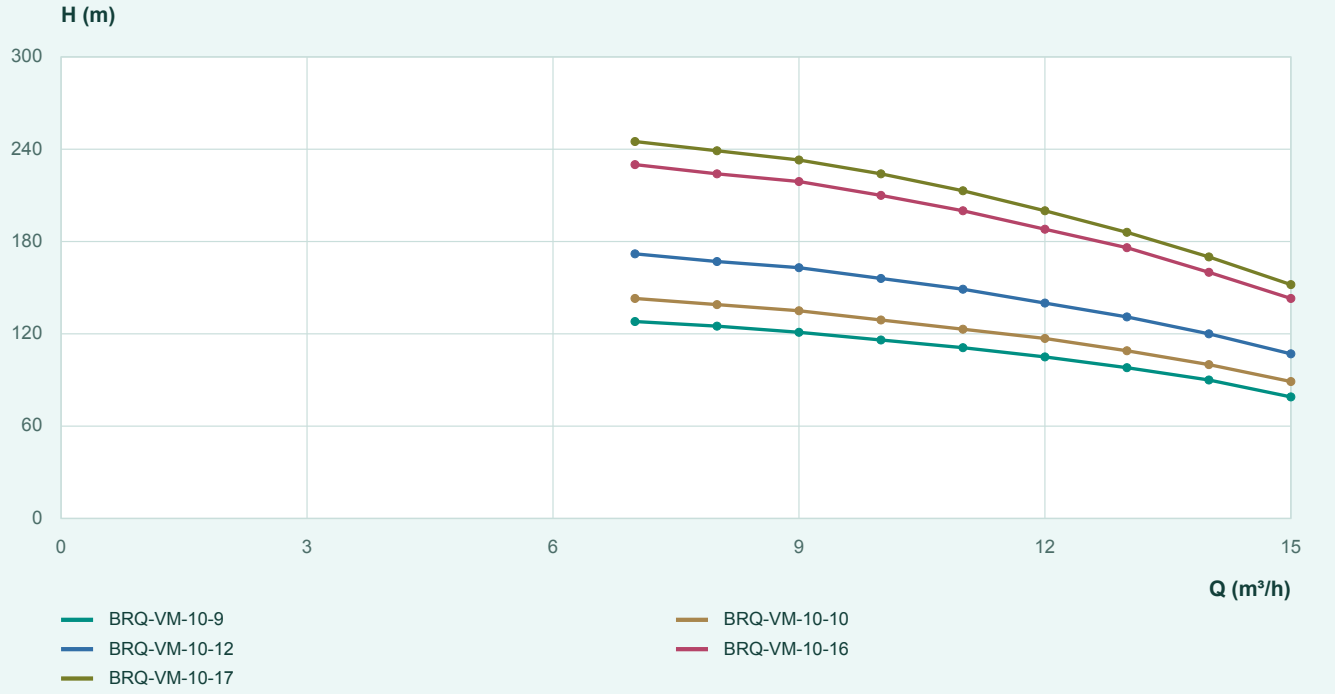

3500 rpm

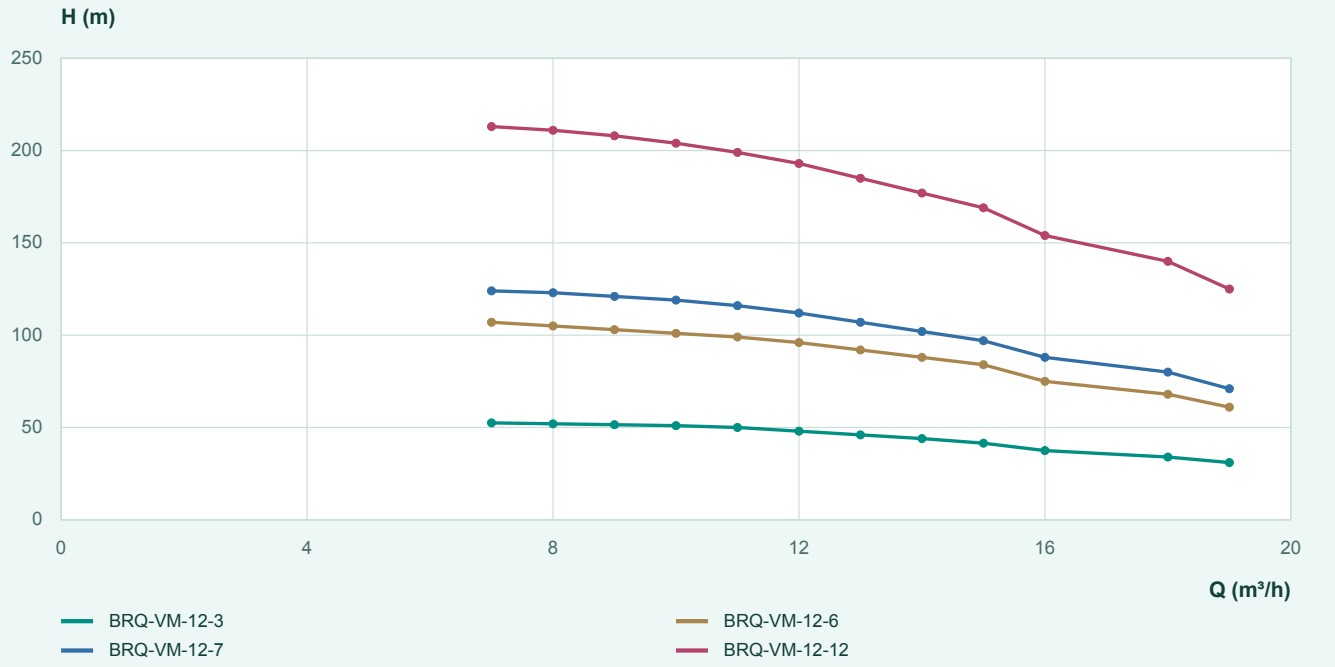


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

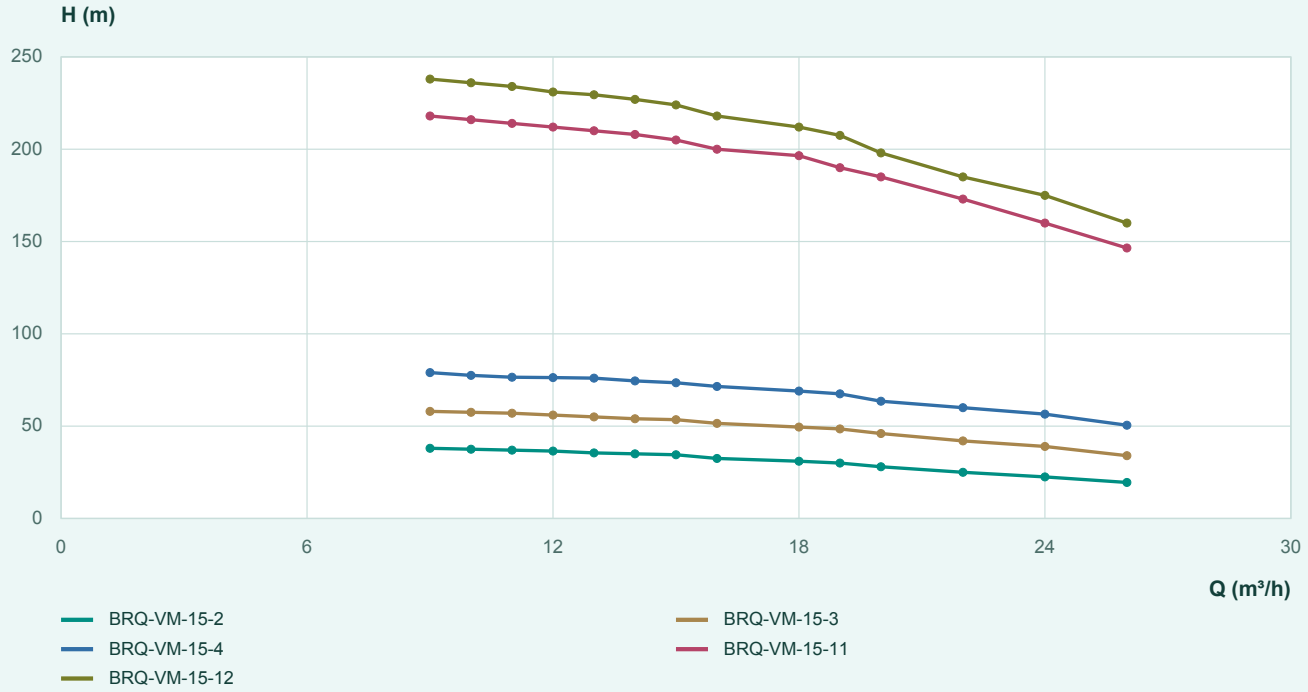

3500 rpm

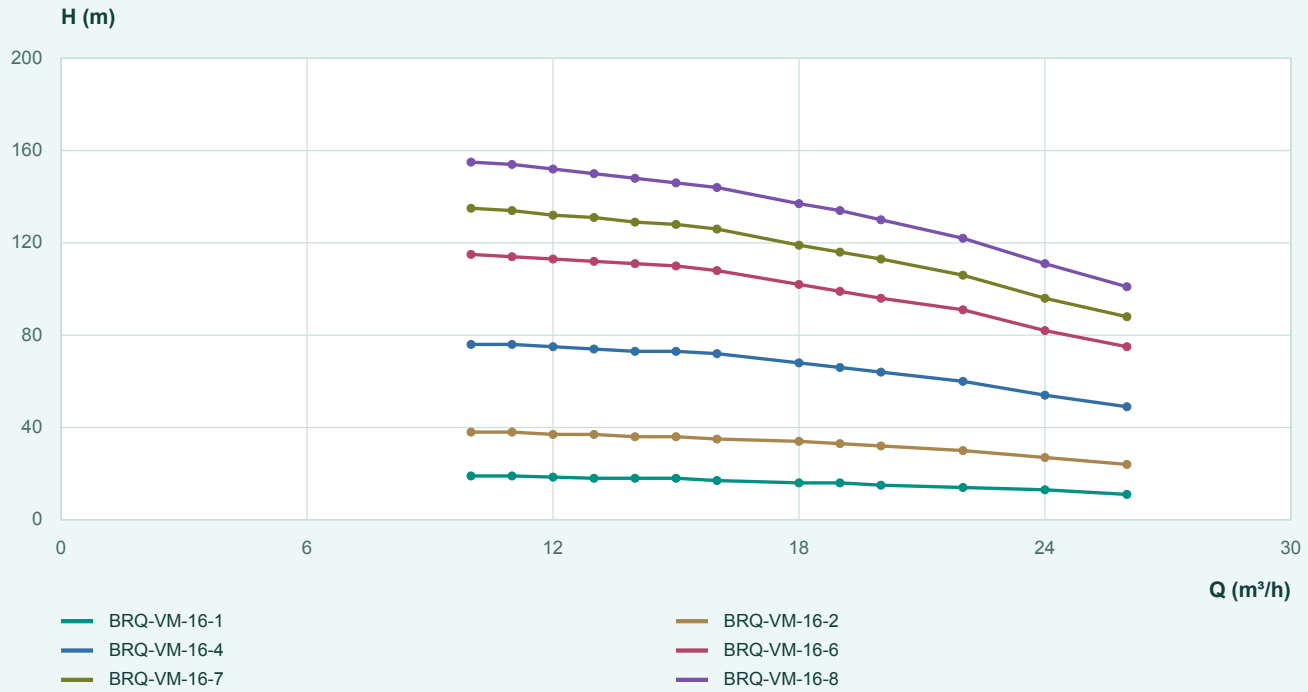


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

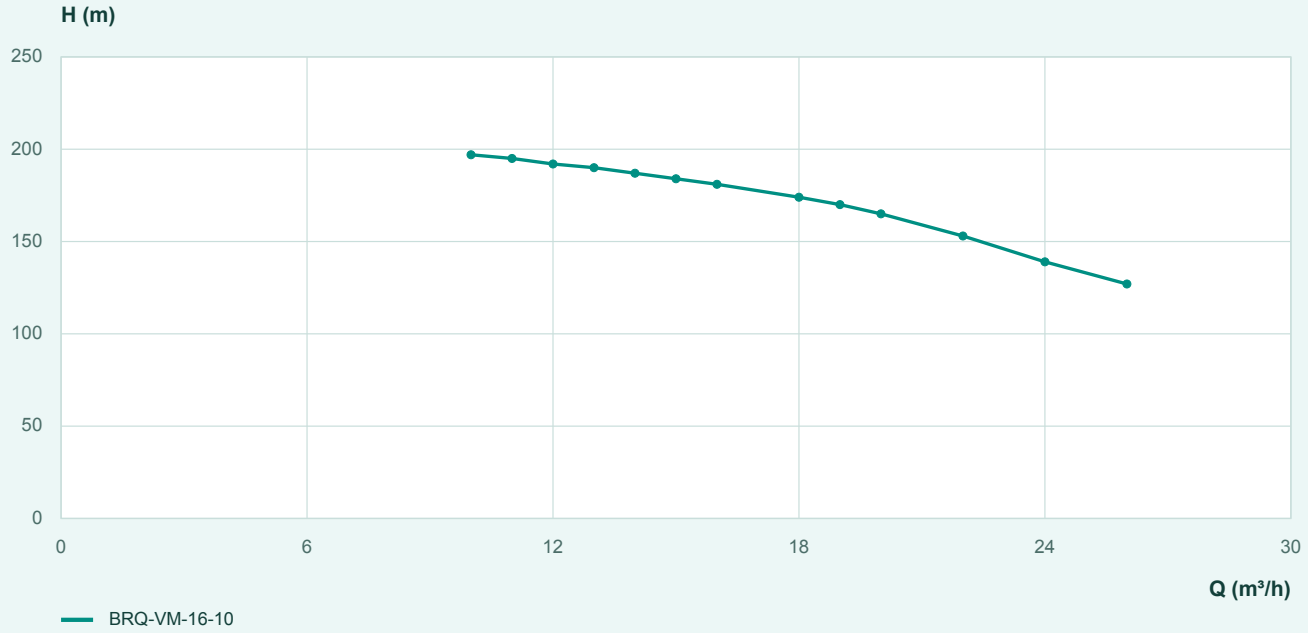

3500 rpm

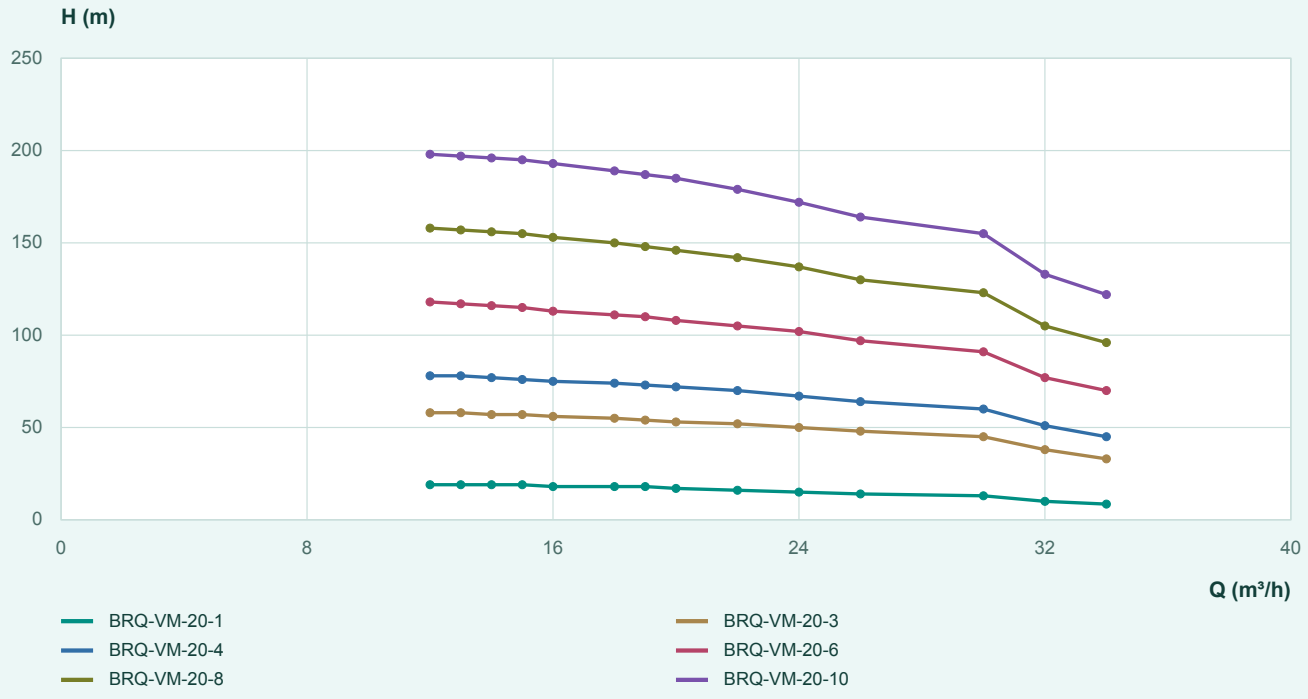

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm



BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm

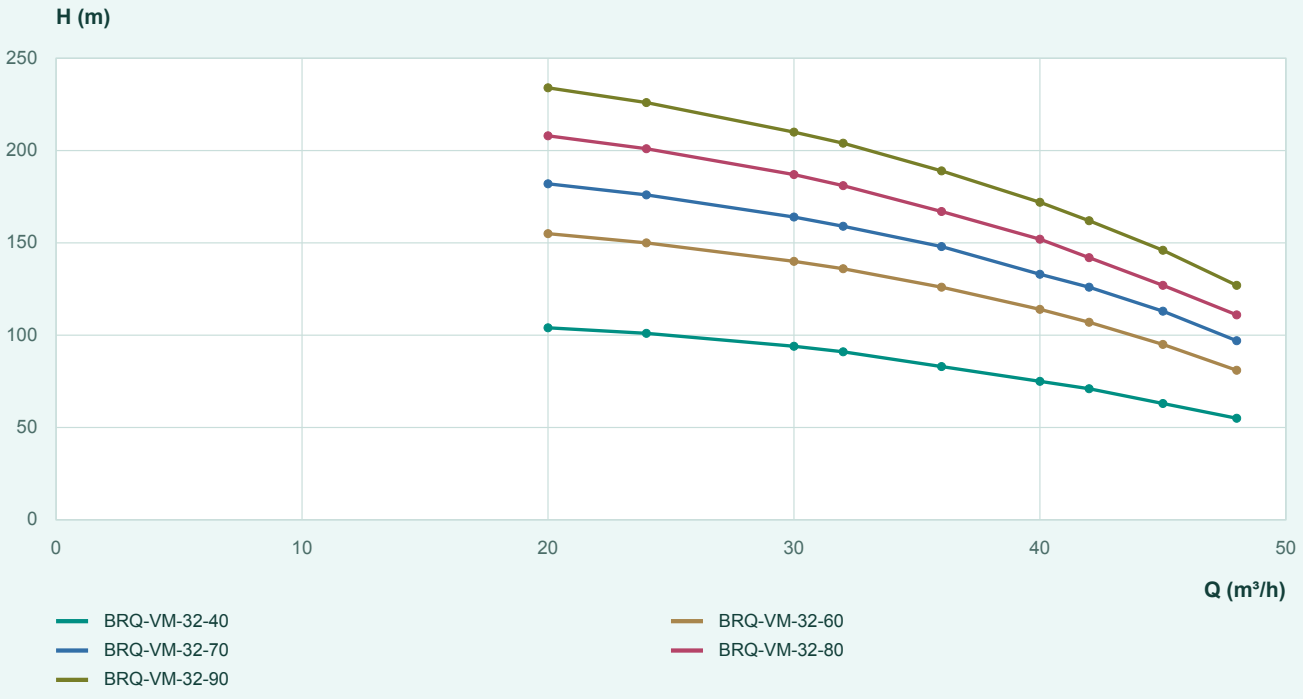


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics

60 Hz / Flow and head

3500 rpm

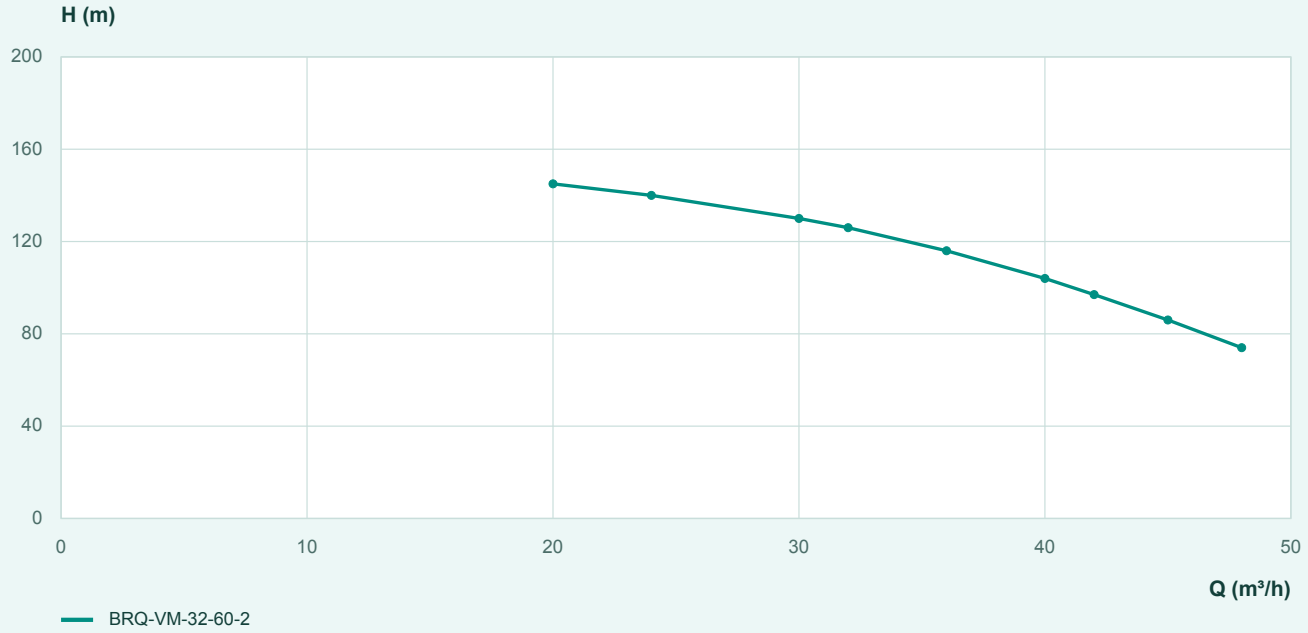

3500 rpm



BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm

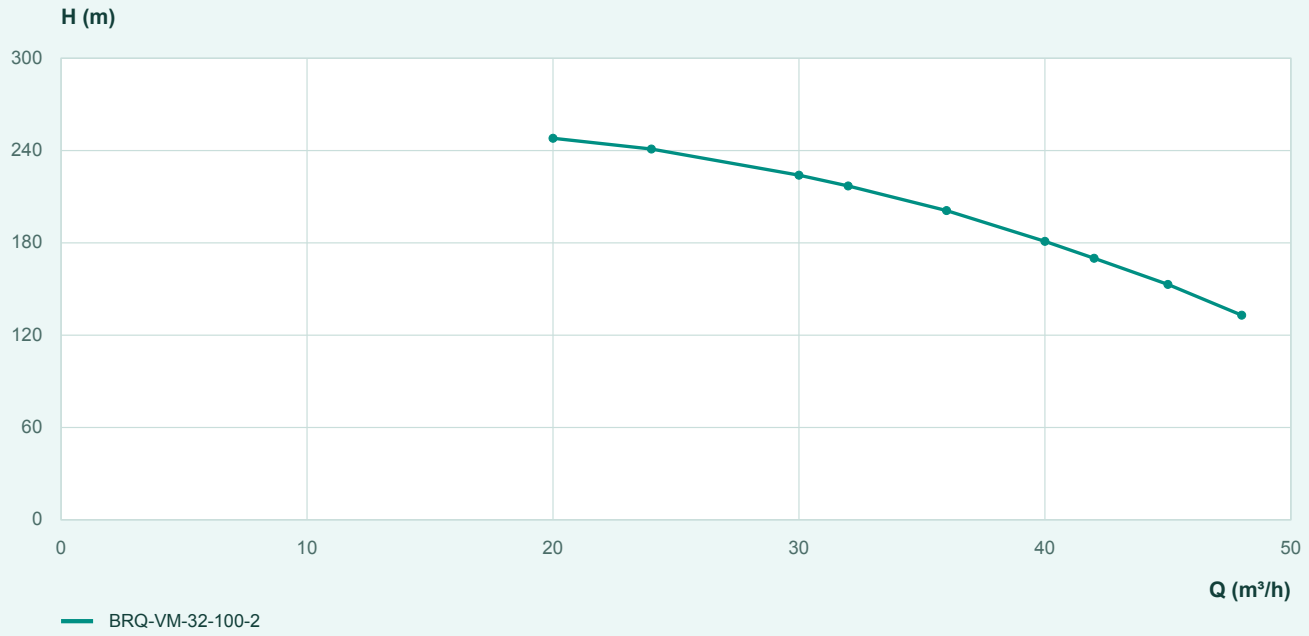


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

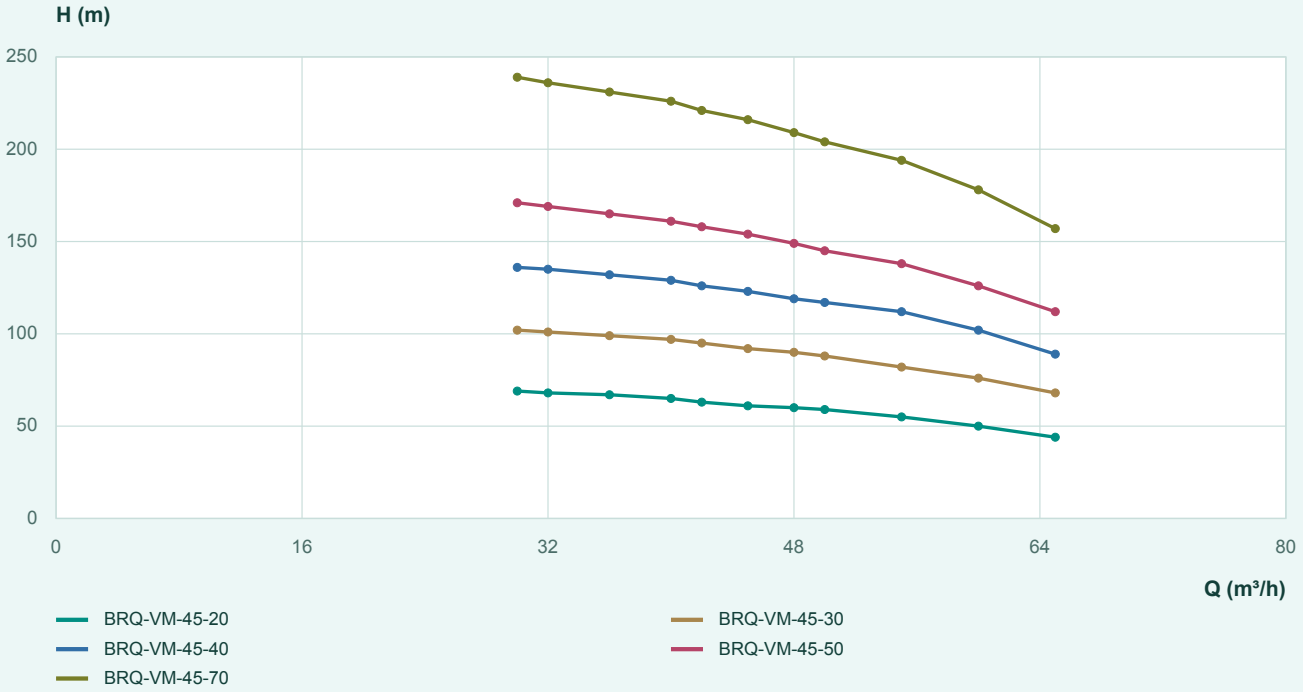

3500 rpm

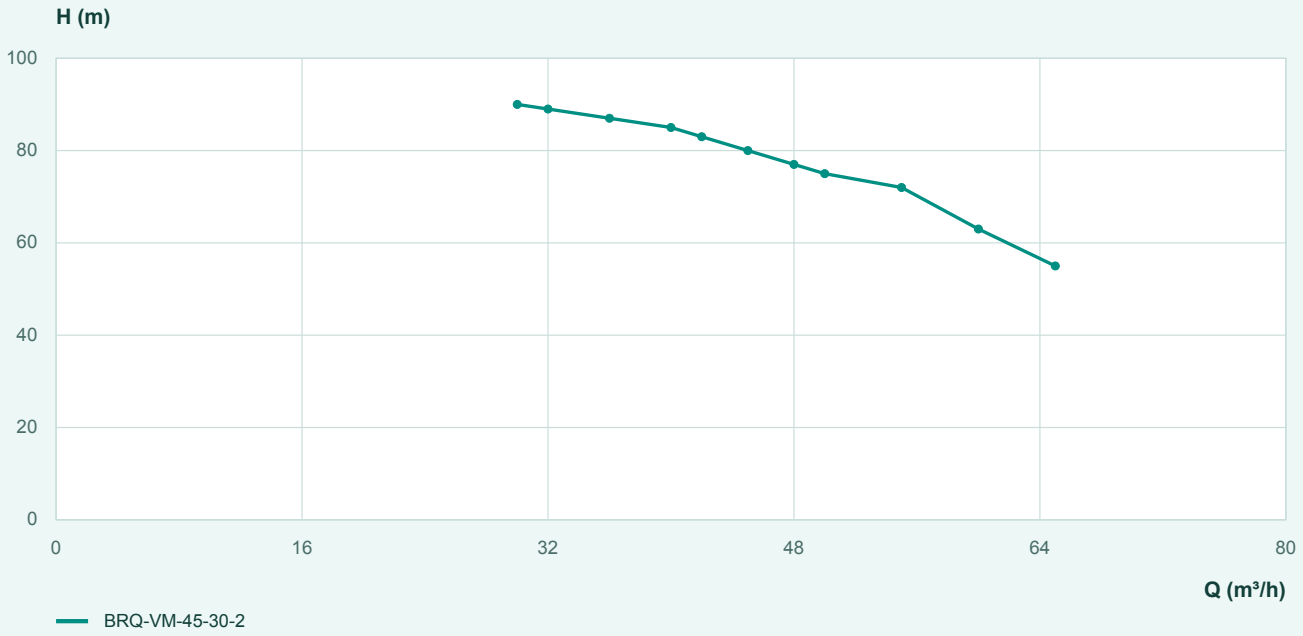

BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm

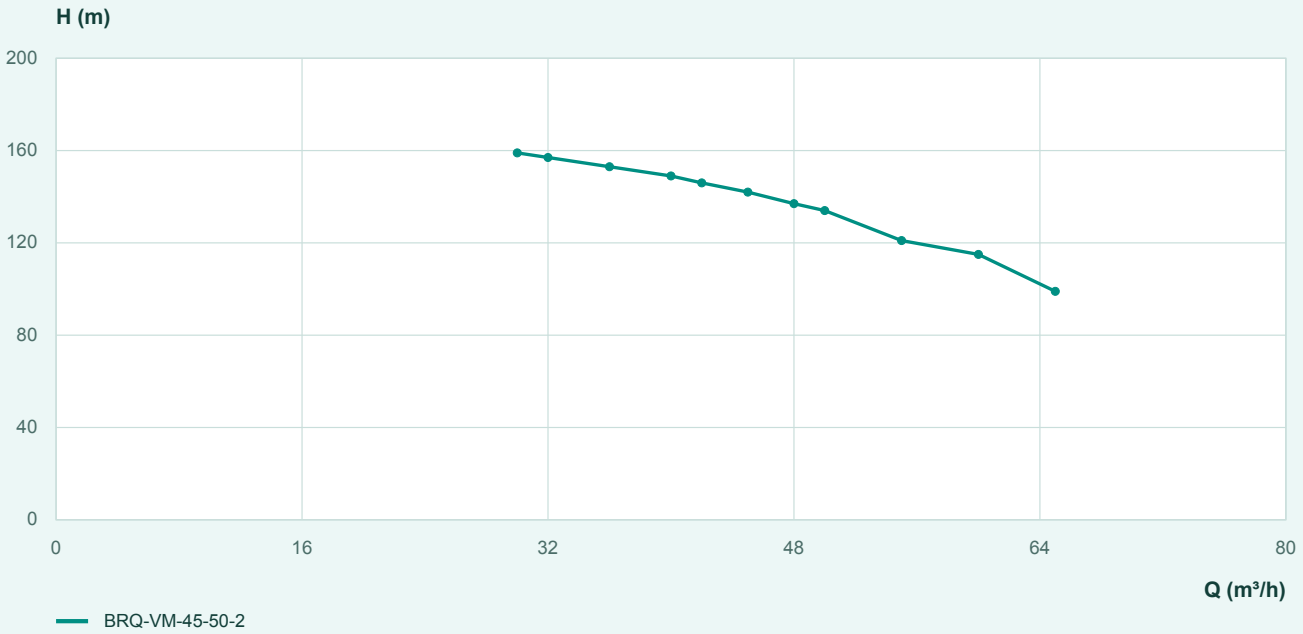

BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm




BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

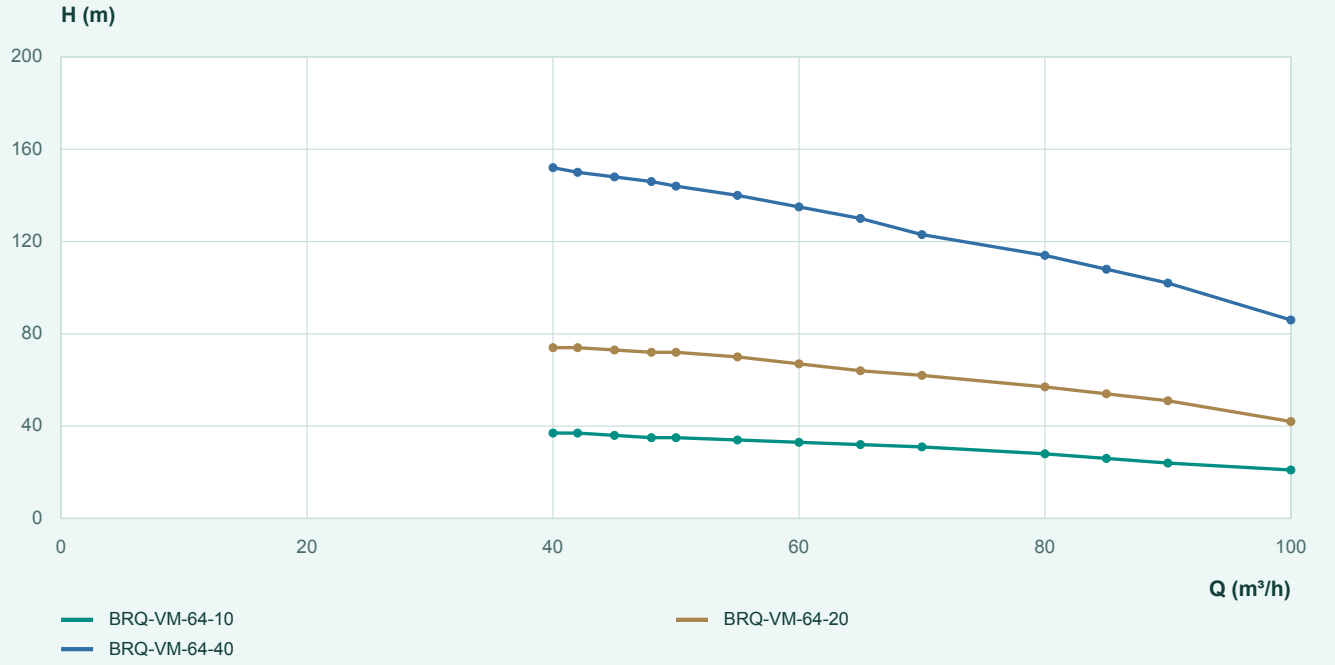

3500 rpm

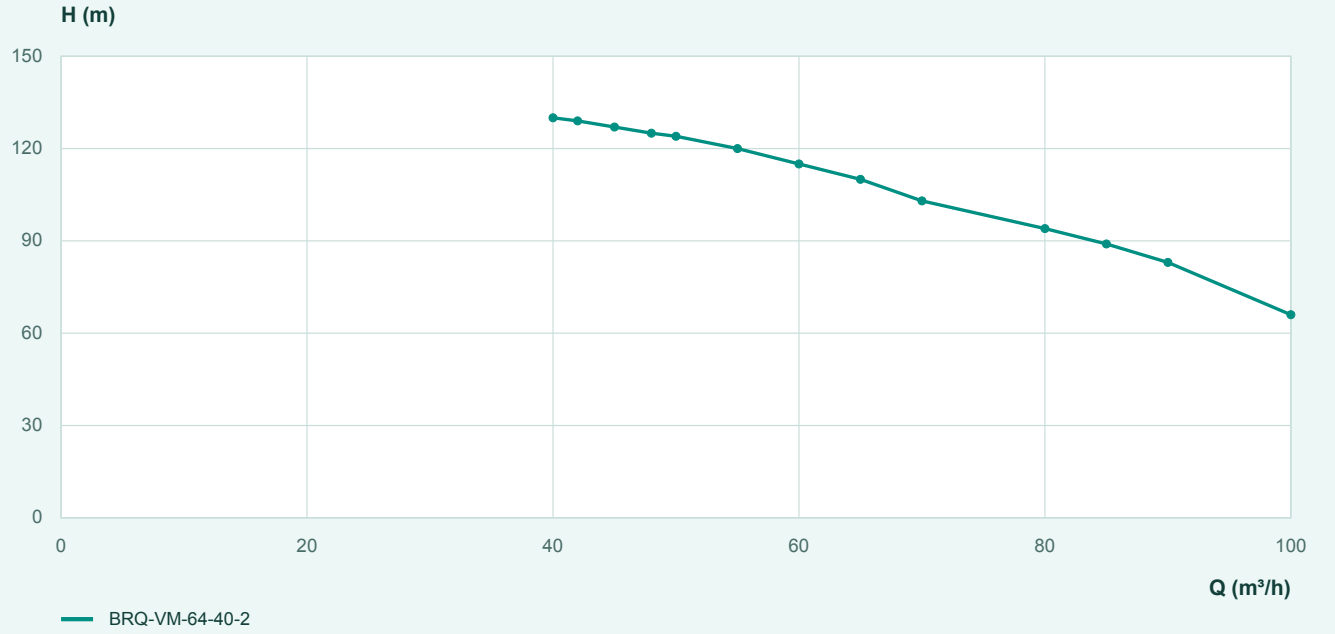

BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm



3500 rpm

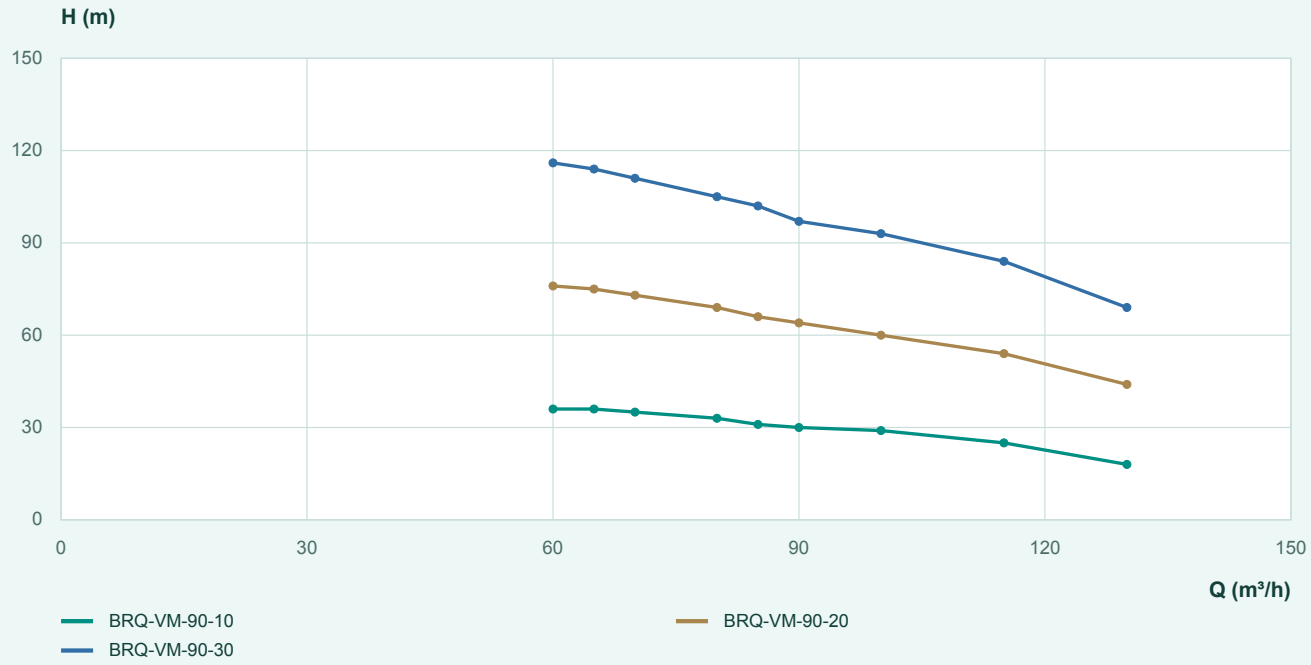


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics

60 Hz / Flow and head

3500 rpm

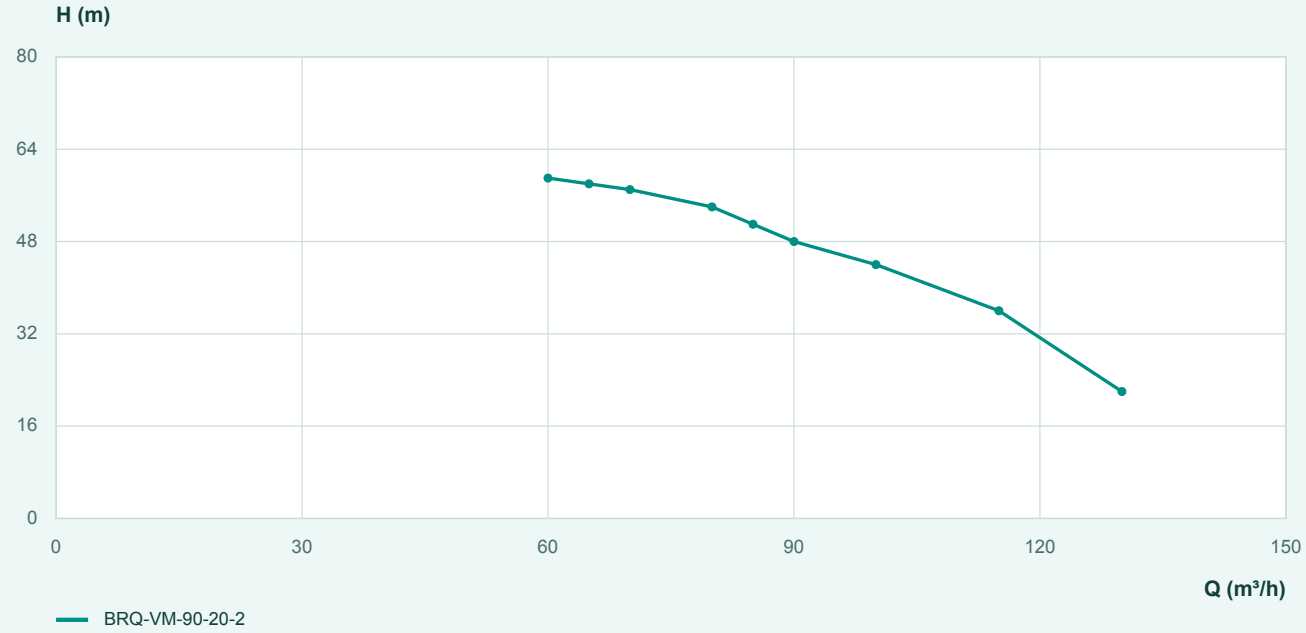

3500 rpm




BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

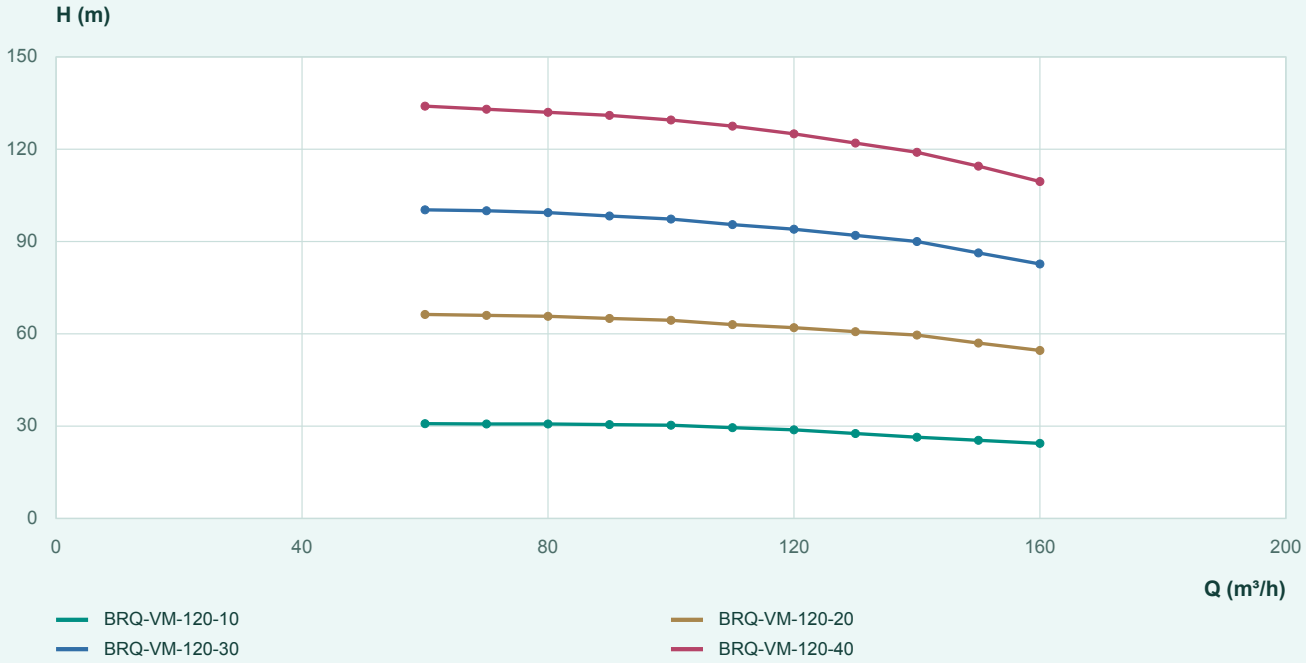

3500 rpm

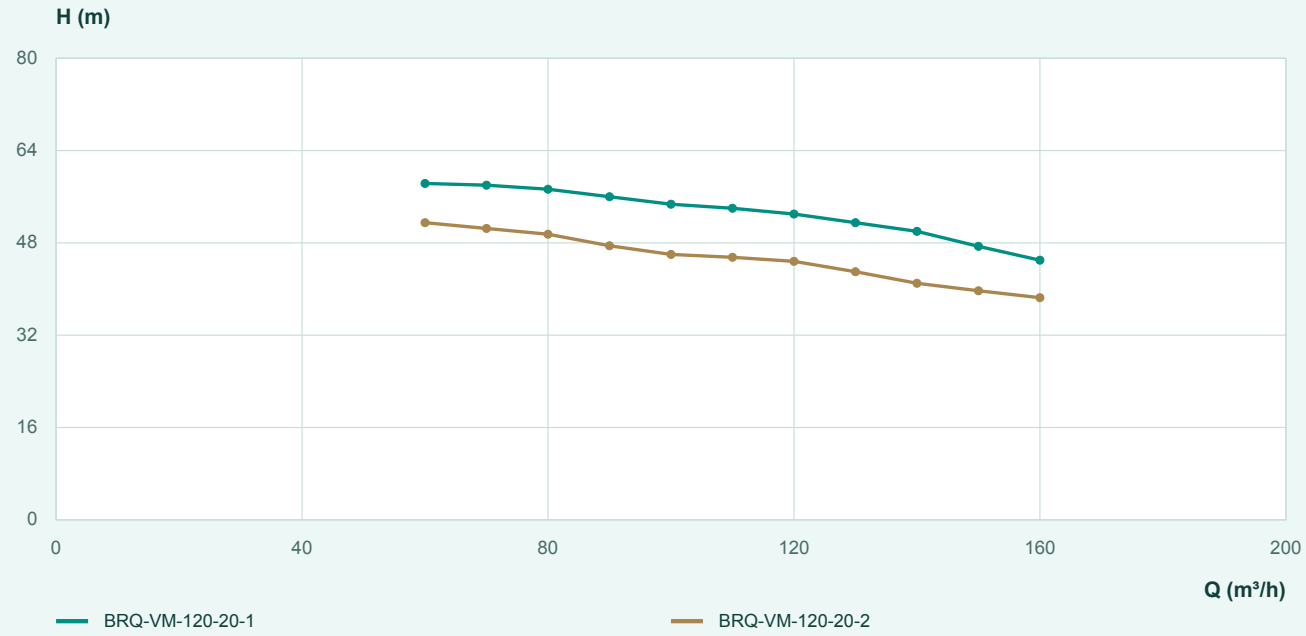


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

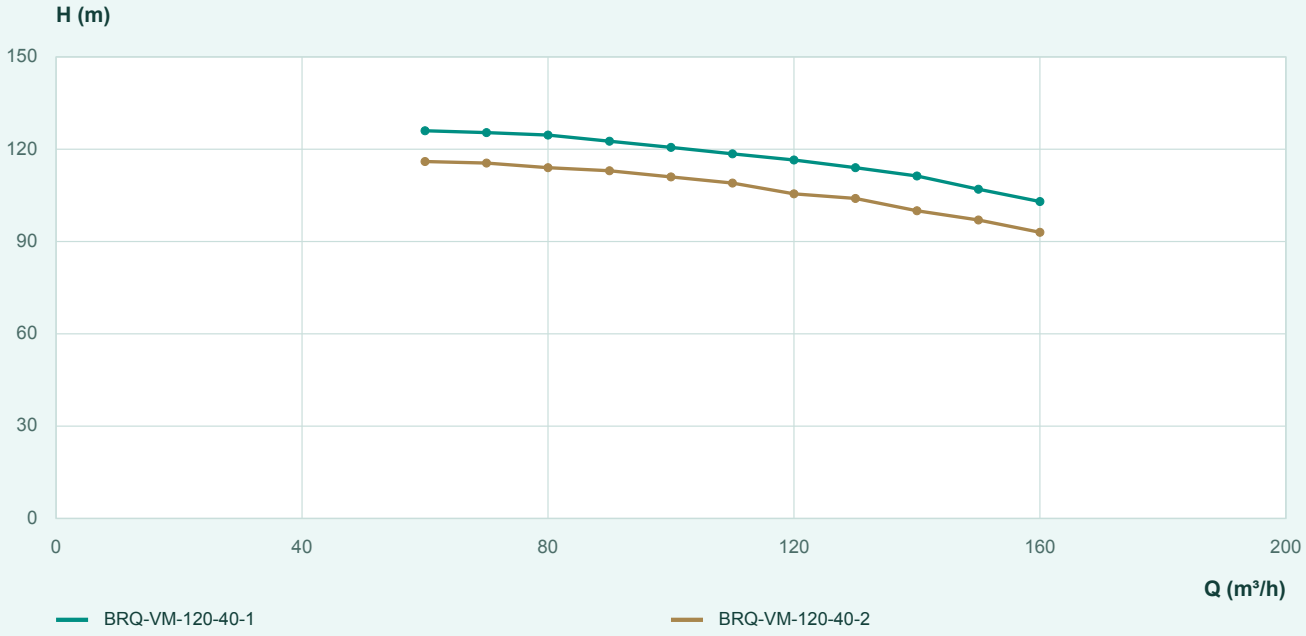

3500 rpm

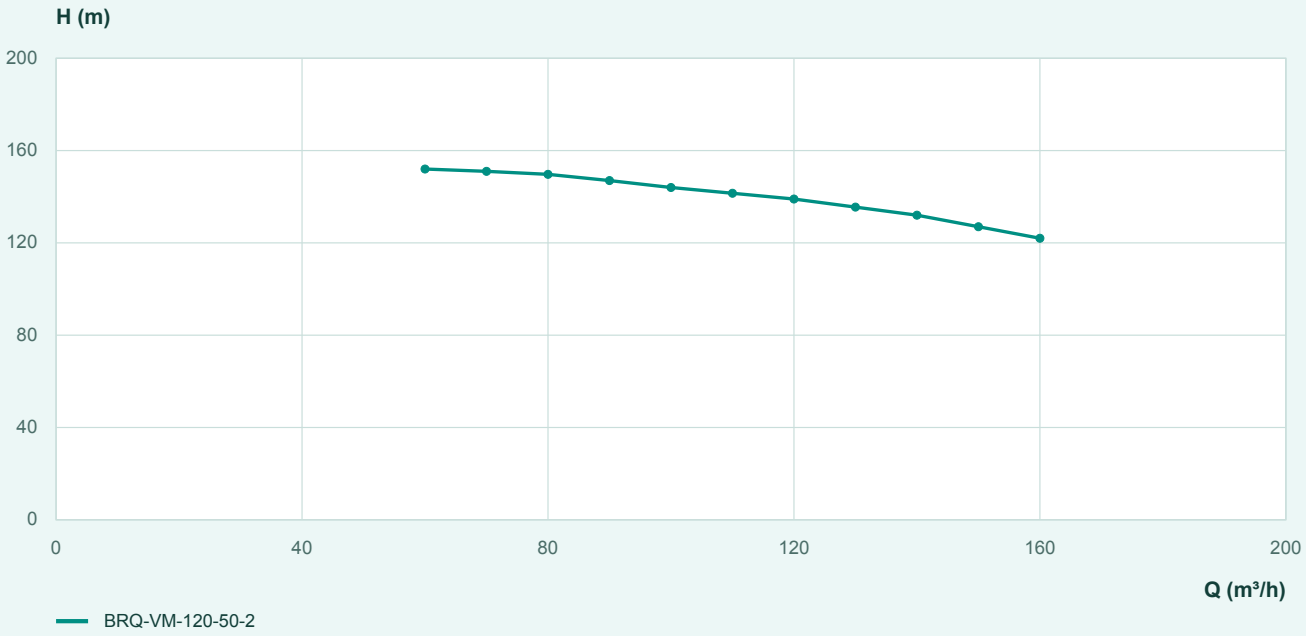


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

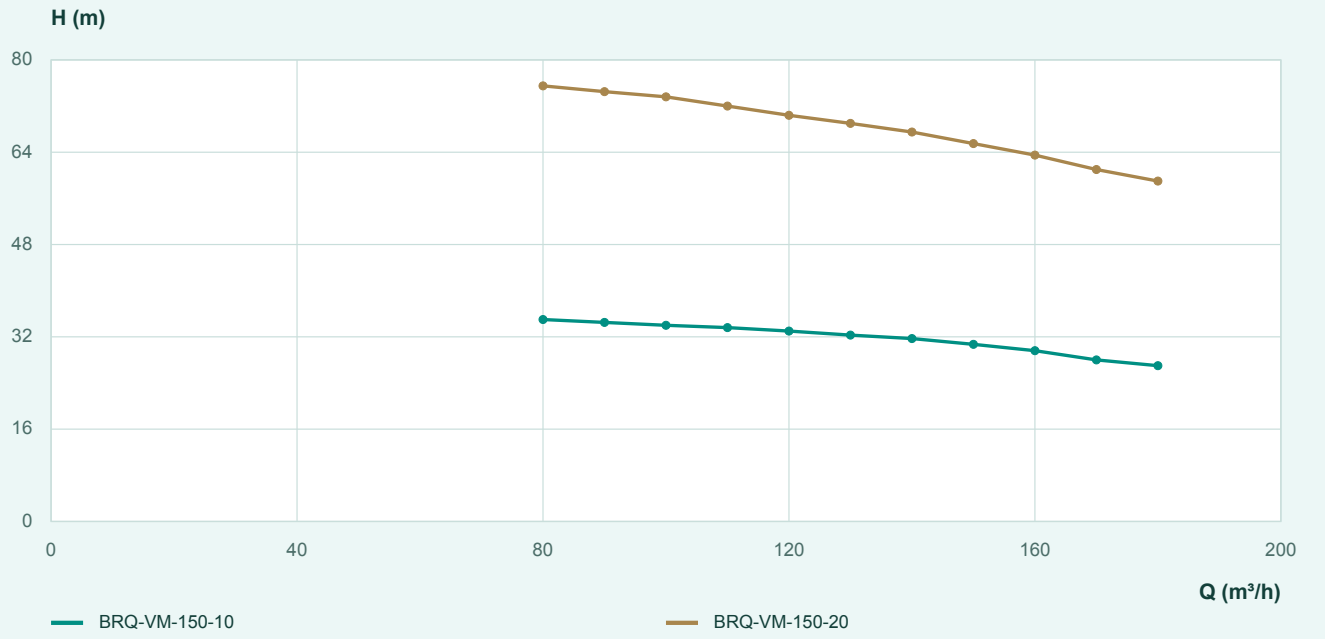

3500 rpm

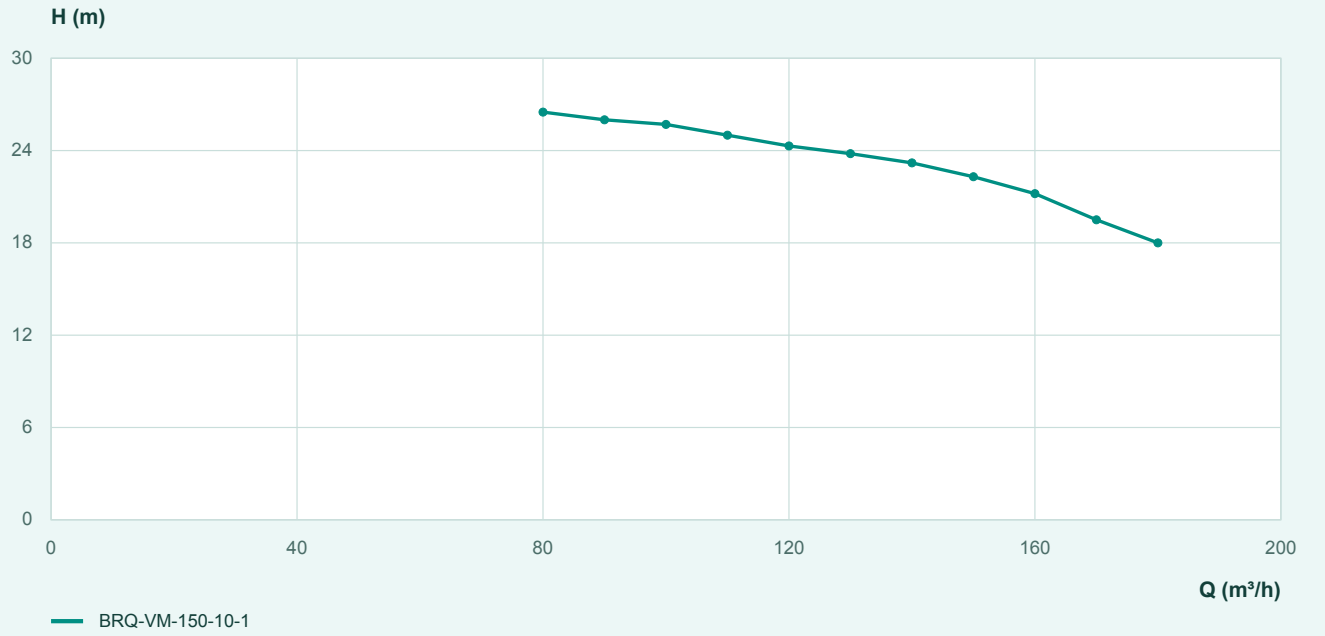


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics

60 Hz / Flow and head

3500 rpm

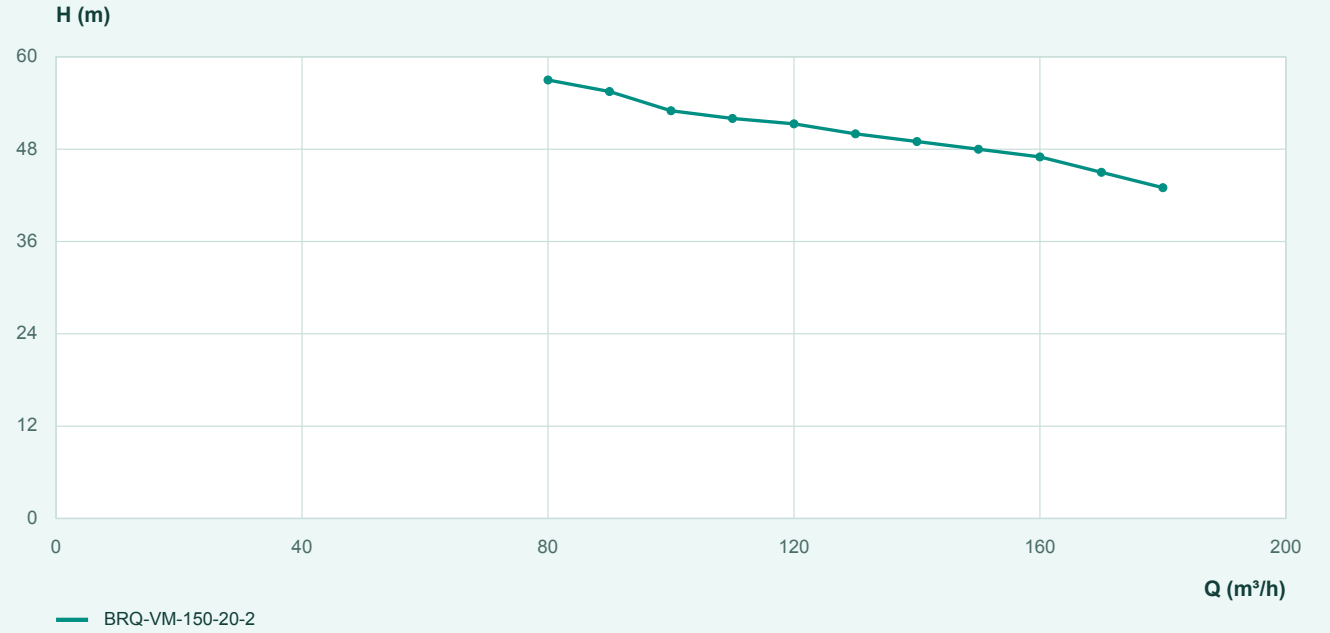

3500 rpm




BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

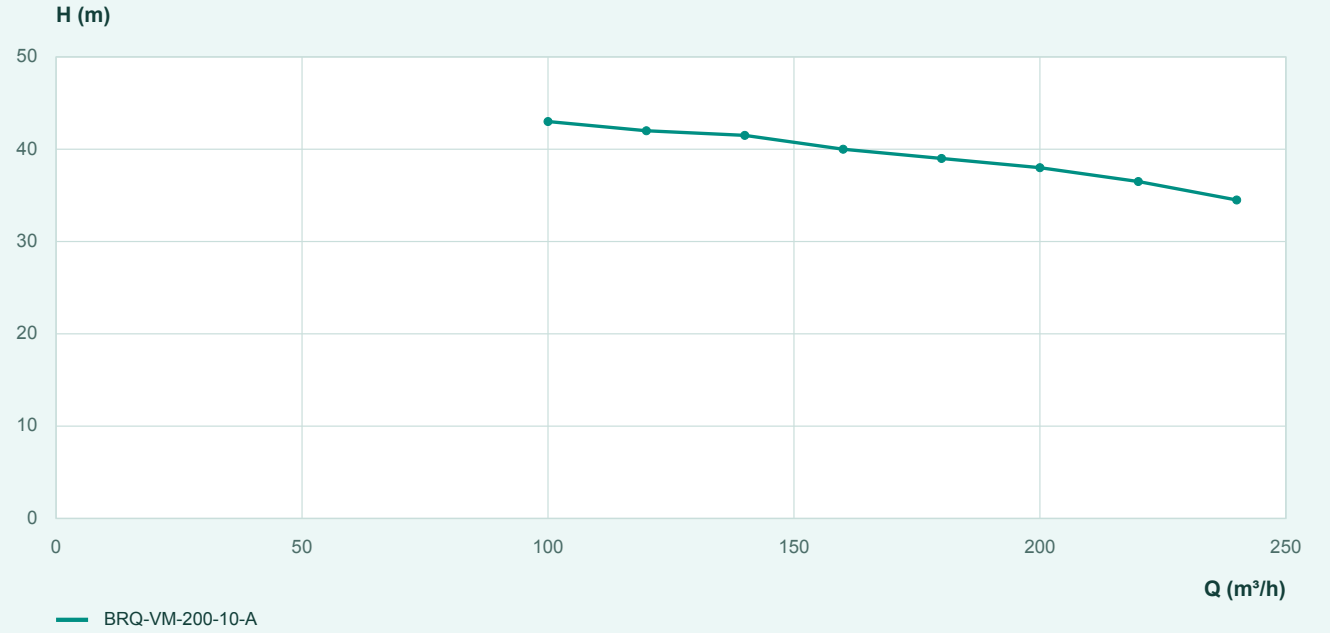

3500 rpm

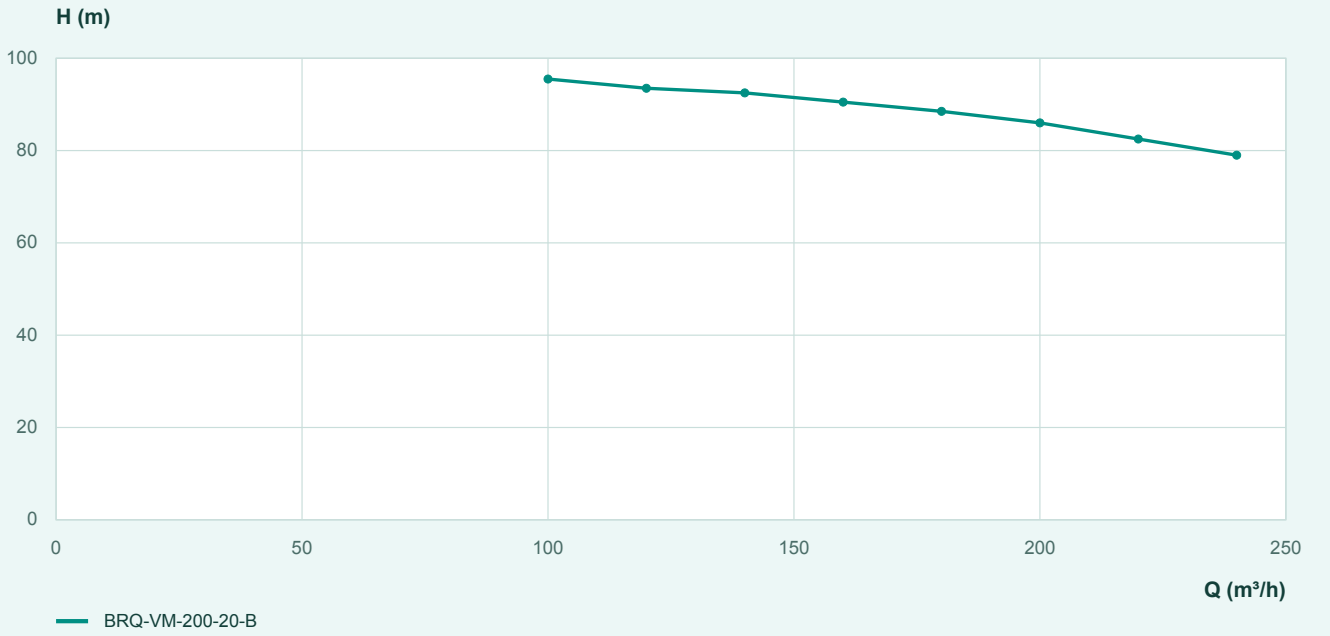


BRQ-VM / STAINLESS VERTICAL MULTISTAGE


Performance characteristics

60 Hz / Flow and head

3500 rpm

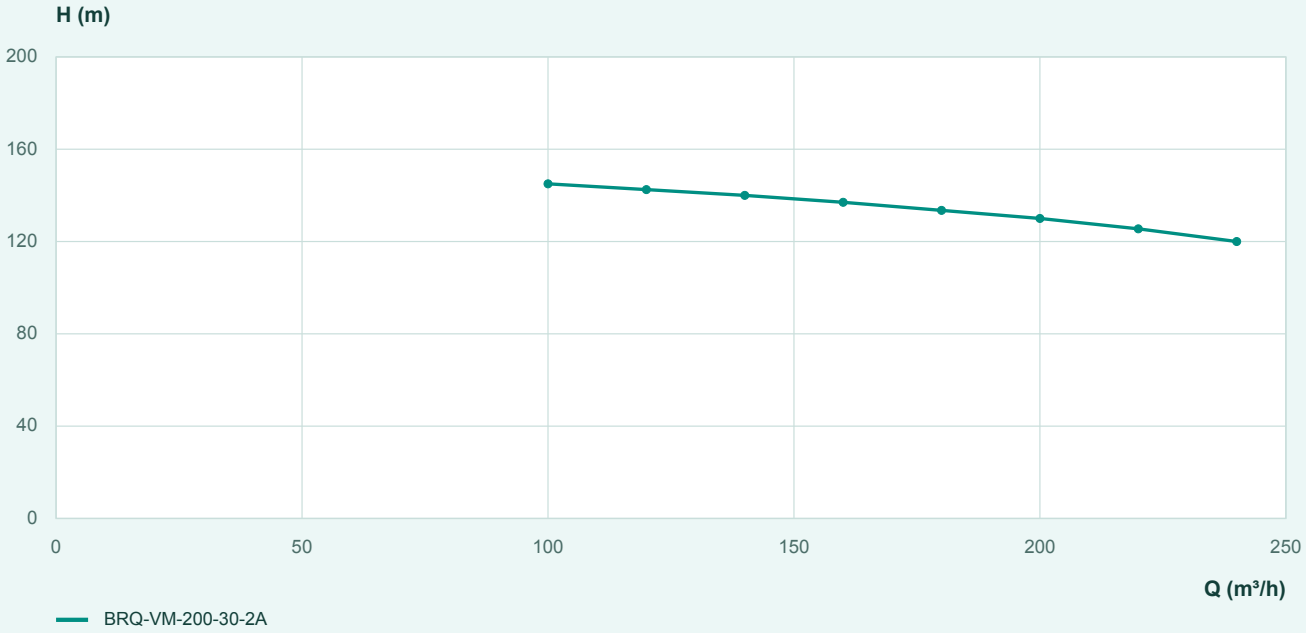

3500 rpm

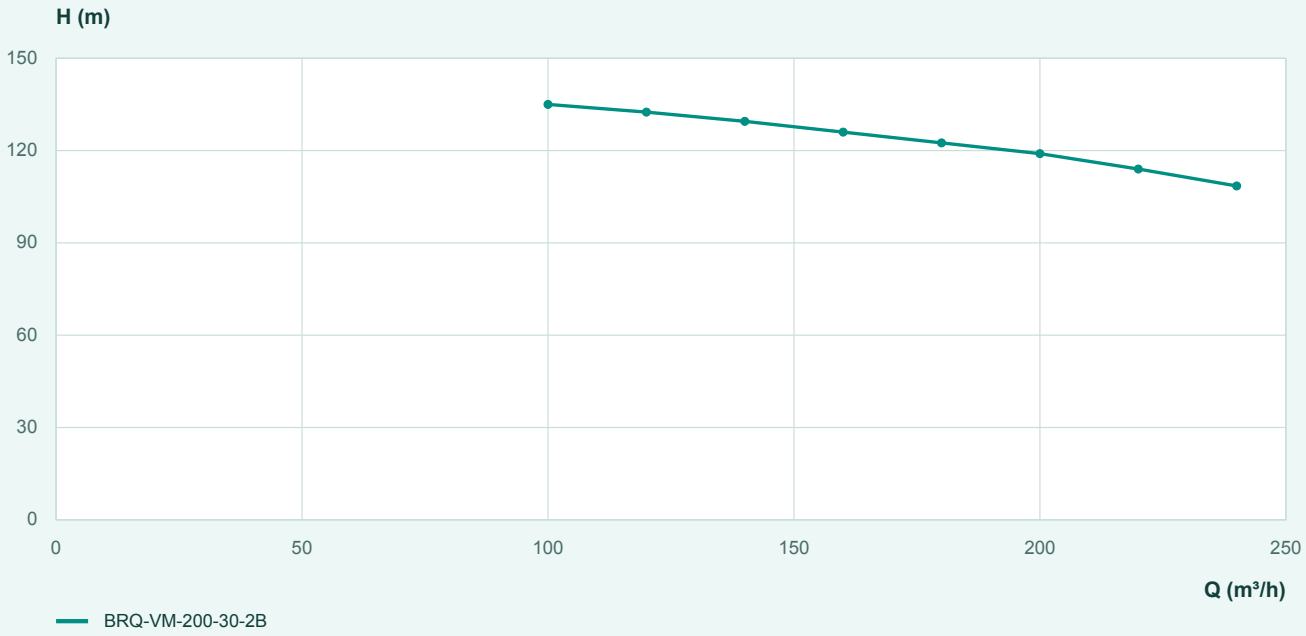


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Performance characteristics


60 Hz / Flow and head

3500 rpm

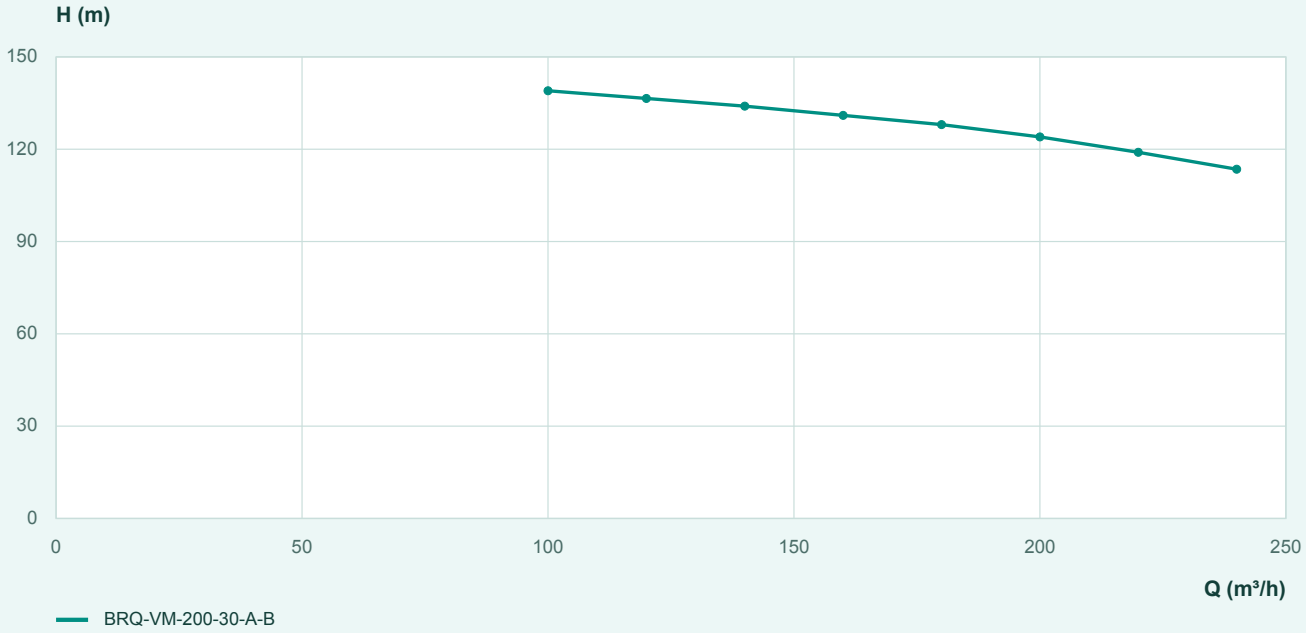


Installation dimensions

Dimensions in mm

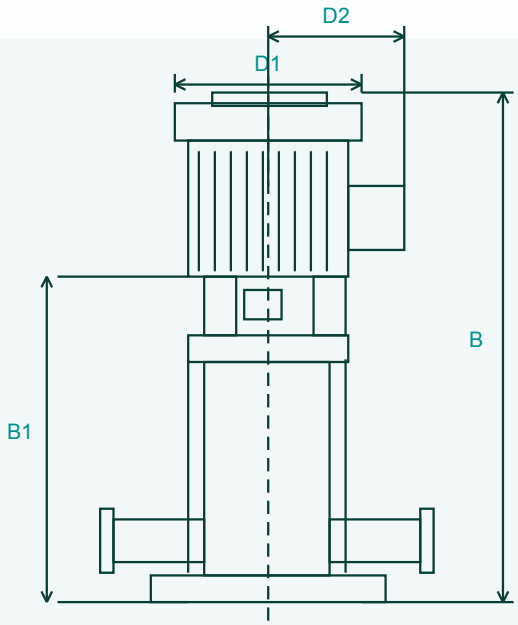

Inline connections

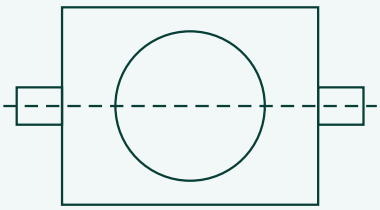


Model / size	B1	B	D1	D2	kg
BRQ-VM-1-2	258	483	148	117	20
BRQ-VM-1-3	276	501	148	117	20
BRQ-VM-1-4	294	519	148	117	21
BRQ-VM-1-5	312	537	148	117	22
BRQ-VM-1-6	330	555	148	117	23
BRQ-VM-1-7	358	603	170	142	26
BRQ-VM-1-8	376	621	170	142	27
BRQ-VM-1-9	394	639	170	142	28
BRQ-VM-1-10	412	657	170	142	29
BRQ-VM-1-11	430	675	170	142	29
BRQ-VM-1-12	448	693	170	142	30
BRQ-VM-1-13	466	711	170	142	31
BRQ-VM-1-15	512	802	190	155	37
BRQ-VM-1-17	548	838	190	155	38
BRQ-VM-1-19	584	874	190	155	41
BRQ-VM-1-21	620	910	190	155	42
BRQ-VM-1-23	656	946	190	155	43


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Installation dimensions

Dimensions in mm

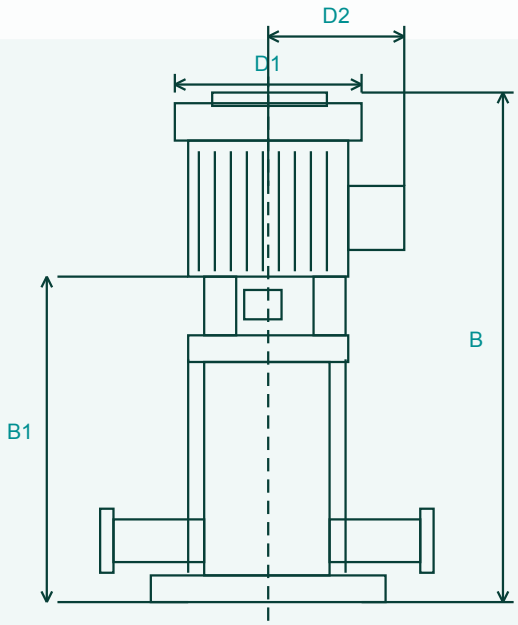


Inline connections

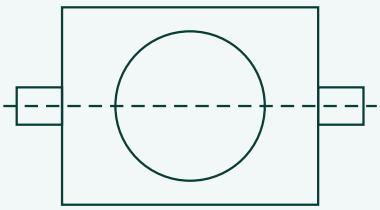


Model / size	B1	B	D1	D2	kg
BRQ-VM-1-25	702	1047	197	165	51
BRQ-VM-2-2	258	483	148	117	21
BRQ-VM-2-3	286	531	170	142	24
BRQ-VM-2-4	304	549	170	142	25
BRQ-VM-2-5	322	567	170	142	26
BRQ-VM-2-6	340	585	170	142	26
BRQ-VM-2-7	368	658	190	155	32
BRQ-VM-2-9	404	694	190	155	36
BRQ-VM-2-11	440	730	190	155	37
BRQ-VM-2-13	486	831	197	165	44
BRQ-VM-2-15	522	867	197	165	45
BRQ-VM-2-18	576	931	230	188	54
BRQ-VM-3-2	258	483	148	117	20
BRQ-VM-3-3	276	501	148	117	21
BRQ-VM-3-4	294	519	148	117	22
BRQ-VM-3-5	322	567	170	142	25
BRQ-VM-3-6	340	585	170	142	26

Installation dimensions

Dimensions in mm

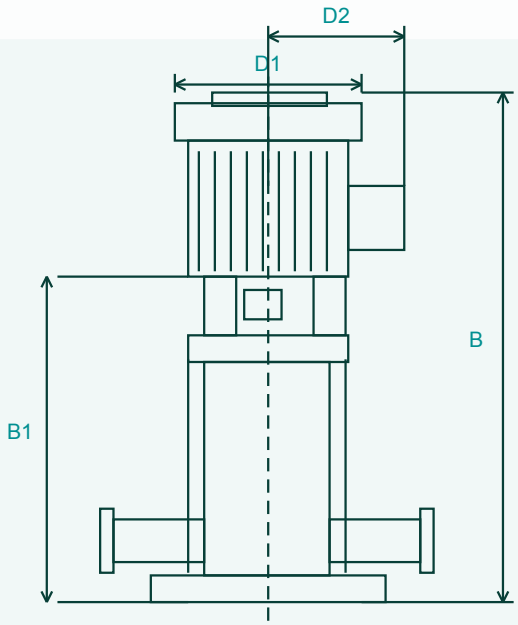

Inline connections

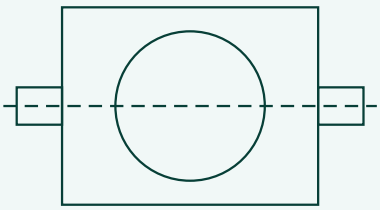


Model / size	B1	B	D1	D2	kg
BRQ-VM-3-7	358	603	170	142	27
BRQ-VM-3-8	376	621	170	142	27
BRQ-VM-3-9	404	694	190	155	33
BRQ-VM-3-10	422	712	190	155	34
BRQ-VM-3-11	440	730	190	155	34
BRQ-VM-3-12	458	748	190	155	37
BRQ-VM-3-13	476	766	190	155	38
BRQ-VM-3-15	512	802	190	155	39
BRQ-VM-3-17	548	838	190	155	40
BRQ-VM-3-19	594	939	197	165	48
BRQ-VM-3-21	630	975	197	165	49
BRQ-VM-3-23	666	1011	197	165	50
BRQ-VM-3-25	702	1057	230	188	58
BRQ-VM-4-2	286	531	170	142	24
BRQ-VM-4-3	313	558	170	142	25
BRQ-VM-4-4	350	640	190	155	31
BRQ-VM-4-5	376	667	190	155	34


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Installation dimensions

Dimensions in mm

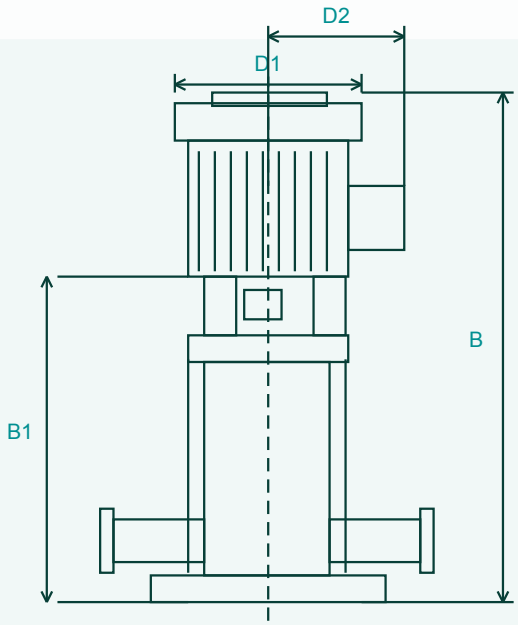


Inline connections

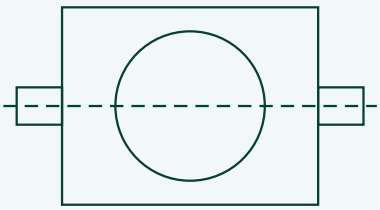


Model / size	B1	B	D1	D2	kg
BRQ-VM-4-6	404	694	190	155	35
BRQ-VM-4-7	441	786	197	165	42
BRQ-VM-4-8	468	813	197	165	42
BRQ-VM-4-10	522	877	230	188	51
BRQ-VM-4-12	576	931	230	188	52
BRQ-VM-4-14	650	1040	260	208	64
BRQ-VM-4-16	704	1094	260	208	66
BRQ-VM-5-2	276	506	148	117	22
BRQ-VM-5-3	313	563	170	142	25
BRQ-VM-5-4	340	590	170	142	27
BRQ-VM-5-5	377	687	190	155	29
BRQ-VM-5-6	404	714	190	155	29
BRQ-VM-5-7	431	741	190	155	34
BRQ-VM-5-8	458	768	190	155	34
BRQ-VM-5-9	485	795	190	155	35
BRQ-VM-5-11	549	899	197	165	42
BRQ-VM-5-13	603	953	197	165	43

Installation dimensions

Dimensions in mm

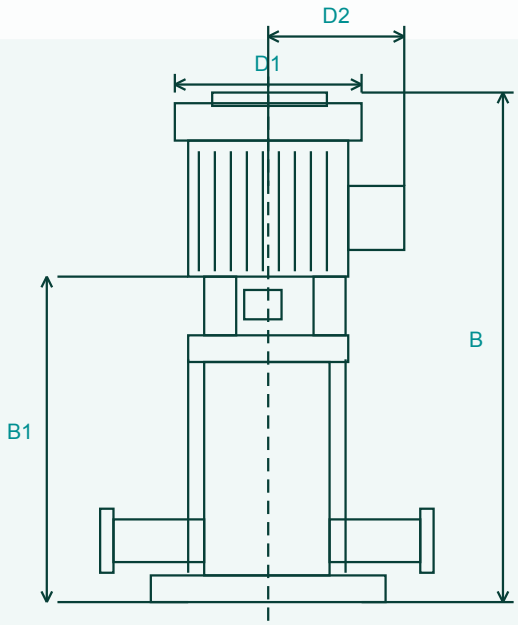

Inline connections

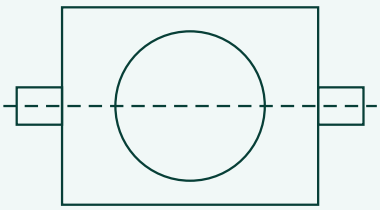


Model / size	B1	B	D1	D2	kg
BRQ-VM-5-14	630	990	230	185	50
BRQ-VM-5-16	684	1044	230	185	51
BRQ-VM-5-17	711	1071	230	185	51
BRQ-VM-5-18	758	1158	260	210	66
BRQ-VM-5-22	866	1266	260	210	67
BRQ-VM-5-24	920	1320	260	210	73
BRQ-VM-5-25	947	1347	260	210	73
BRQ-VM-8-1	347	592	170	142	32
BRQ-VM-8-2	357	647	190	155	38
BRQ-VM-8-3	387	677	190	155	41
BRQ-VM-8-4	427	772	197	165	49
BRQ-VM-8-5	457	802	197	165	50
BRQ-VM-8-6	487	842	230	188	58
BRQ-VM-8-8	567	957	260	208	71
BRQ-VM-8-10	627	1017	260	208	80
BRQ-VM-8-12	687	1077	260	208	82
BRQ-VM-8-14	835	1335	330	255	153


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Installation dimensions

Dimensions in mm

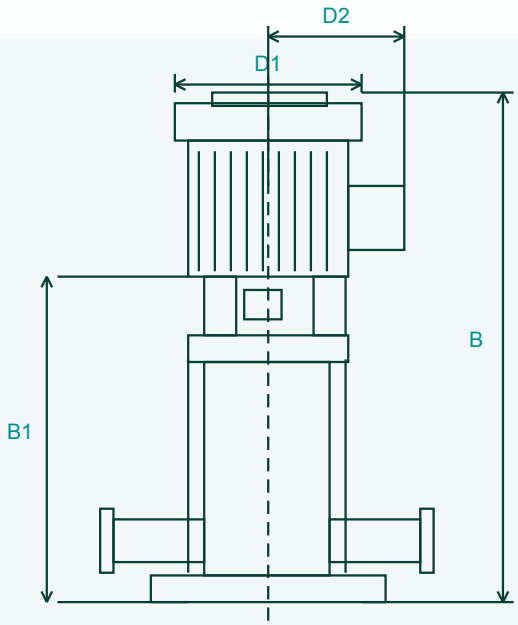


Inline connections

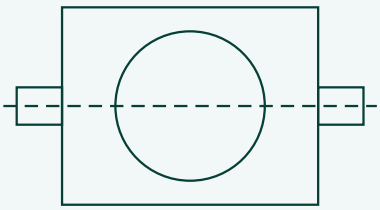


Model / size	B1	B	D1	D2	kg
BRQ-VM-10-1	347	592	170	142	40
BRQ-VM-10-2	347	637	190	155	47
BRQ-VM-10-3	377	667	190	155	51
BRQ-VM-10-4	417	762	197	165	60
BRQ-VM-10-5	447	792	197	165	61
BRQ-VM-10-6	477	832	230	188	70
BRQ-VM-10-7	517	907	260	208	92
BRQ-VM-10-8	547	937	260	208	93
BRQ-VM-10-9	577	967	260	208	94
BRQ-VM-10-10	607	997	260	208	98
BRQ-VM-10-12	667	1057	260	208	100
BRQ-VM-10-14	747	1247	330	255	157
BRQ-VM-10-16	807	1307	330	255	159
BRQ-VM-10-17	837	1337	330	255	160
BRQ-VM-12-1	357	602	170	142	32
BRQ-VM-12-2	367	657	190	155	41
BRQ-VM-12-3	407	762	230	188	56

Installation dimensions

Dimensions in mm

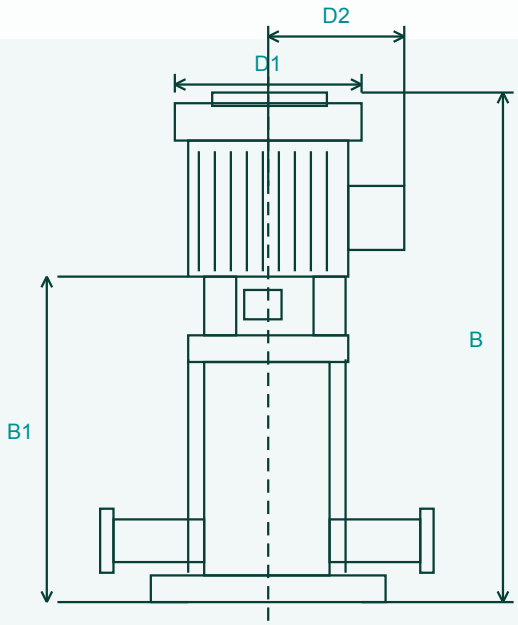


Inline connections

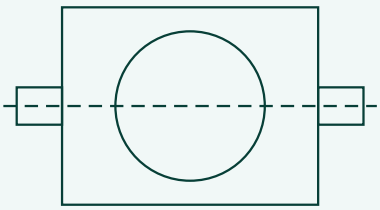


Model / size	B1	B	D1	D2	kg
BRQ-VM-12-4	457	847	260	208	69
BRQ-VM-12-5	487	877	260	208	71
BRQ-VM-12-6	517	907	260	208	77
BRQ-VM-12-7	547	937	260	208	78
BRQ-VM-12-8	665	1165	330	255	147
BRQ-VM-12-10	725	1225	330	255	151
BRQ-VM-12-12	785	1285	330	255	164
BRQ-VM-12-14	845	1345	330	255	167
BRQ-VM-15-1	397	707	190	155	36
BRQ-VM-15-2	452	802	197	165	48
BRQ-VM-15-3	497	857	230	185	57
BRQ-VM-15-4	562	962	260	210	74
BRQ-VM-15-5	607	1007	260	210	82
BRQ-VM-15-6	740	1250	330	255	155
BRQ-VM-15-7	785	1295	330	255	155
BRQ-VM-15-8	830	1340	330	255	156
BRQ-VM-15-9	875	1385	330	255	170

Installation dimensions

Dimensions in mm

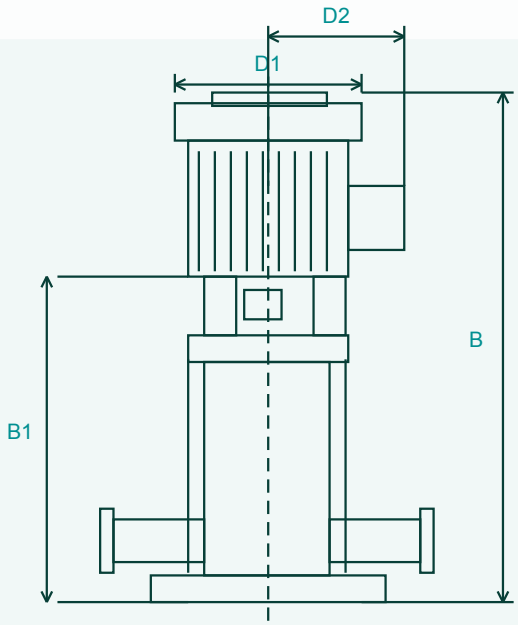

Inline connections

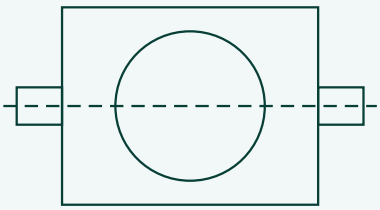


Model / size	B1	B	D1	D2	kg
BRQ-VM-15-10	920	1430	330	255	171
BRQ-VM-15-11	965	1525	330	255	192
BRQ-VM-15-12	1010	1570	330	255	192
BRQ-VM-16-1	397	687	190	155	42
BRQ-VM-16-2	407	762	230	188	56
BRQ-VM-16-3	472	862	260	208	68
BRQ-VM-16-4	517	907	260	208	75
BRQ-VM-16-5	650	1150	330	255	148
BRQ-VM-16-6	695	1195	330	255	150
BRQ-VM-16-7	740	1240	330	255	161
BRQ-VM-16-8	785	1285	330	255	163
BRQ-VM-16-10	875	1425	330	255	186
BRQ-VM-20-1	397	687	190	155	41
BRQ-VM-20-2	407	762	230	188	56
BRQ-VM-20-3	472	862	260	208	69
BRQ-VM-20-4	517	907	260	208	79
BRQ-VM-20-5	650	1150	330	255	148


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Installation dimensions

Dimensions in mm

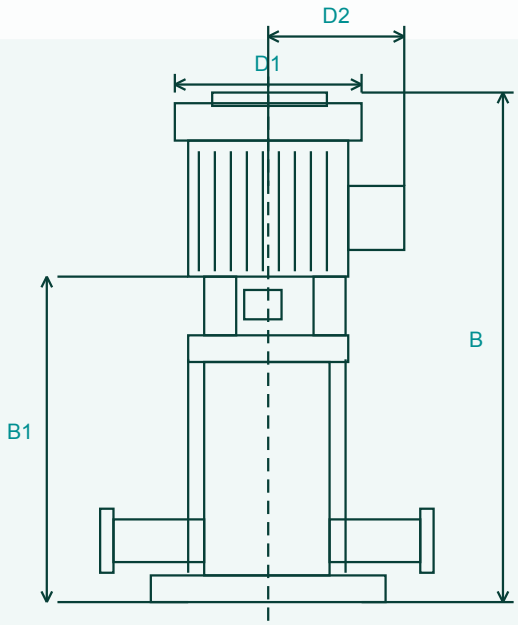

Inline connections

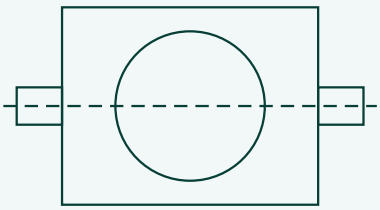


Model / size	B1	B	D1	D2	kg
BRQ-VM-20-6	695	1195	330	255	150
BRQ-VM-20-7	740	1240	330	255	162
BRQ-VM-20-8	785	1285	330	255	163
BRQ-VM-20-10	875	1425	330	255	187
BRQ-VM-32-10	505	860	230	188	81
BRQ-VM-32-10-1	505	850	197	165	73
BRQ-VM-32-20	575	965	260	208	101
BRQ-VM-32-20-2	575	965	260	208	95
BRQ-VM-32-30	750	1250	330	255	172
BRQ-VM-32-30-2	645	1035	330	255	104
BRQ-VM-32-40	820	1320	330	255	186
BRQ-VM-32-40-2	820	1320	330	255	176
BRQ-VM-32-50	890	1440	330	255	211
BRQ-VM-32-50-2	890	1390	330	255	191
BRQ-VM-32-60	960	1510	330	255	216
BRQ-VM-32-60-2	960	1510	330	255	216
BRQ-VM-32-70	1030	1605	360	285	255


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Installation dimensions

Dimensions in mm

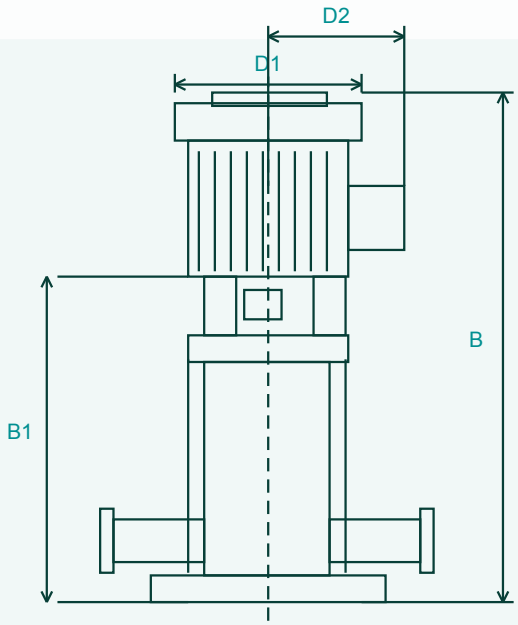


Inline connections

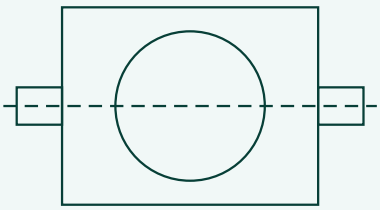


Model / size	B1	B	D1	D2	kg
BRQ-VM-32-70-2	1030	1605	360	285	255
BRQ-VM-32-80	1100	1750	400	310	315
BRQ-VM-32-80-2	1100	1675	400	310	259
BRQ-VM-32-90	1170	1820	400	310	319
BRQ-VM-32-90-2	1170	1820	400	310	319
BRQ-VM-32-100-2	1240	1890	400	310	324
BRQ-VM-45-10	561	952	260	208	106
BRQ-VM-45-10-1	561	952	260	208	101
BRQ-VM-45-20	748	1248	330	255	188
BRQ-VM-45-20-2	748	1248	330	255	178
BRQ-VM-45-30	828	1378	330	255	213
BRQ-VM-45-30-2	828	1378	330	255	213
BRQ-VM-45-40-2	908	1483	360	285	253
BRQ-VM-45-50	988	1638	400	310	313
BRQ-VM-45-60	1068	1718	400	310	340
BRQ-VM-45-60-2	1068	1718	400	310	340
BRQ-VM-45-70	1148	1833	460	340	404

Installation dimensions

Dimensions in mm

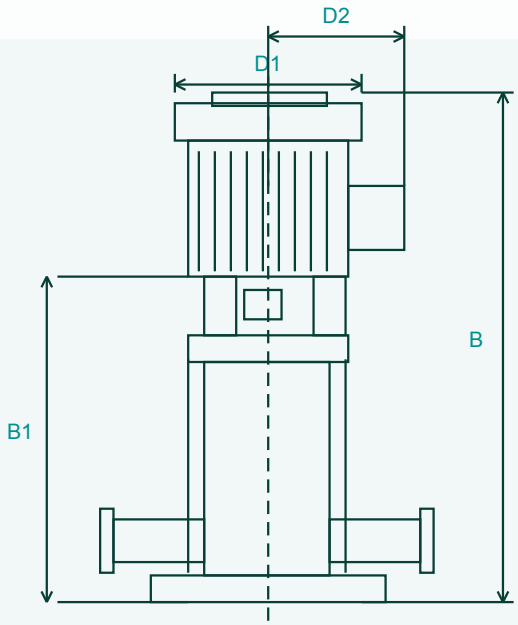


Inline connections

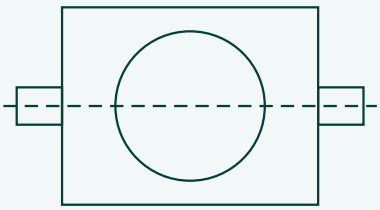


Model / size	B1	B	D1	D2	kg
BRQ-VM-45-70-2	1148	1833	460	340	404
BRQ-VM-64-10	671	1171	330	255	177
BRQ-VM-64-10-1	561	951	260	208	109
BRQ-VM-64-20	754	1329	360	285	248
BRQ-VM-64-20-2	754	1254	330	255	187
BRQ-VM-64-30	836	1486	400	310	313
BRQ-VM-64-30-2	836	1411	360	285	252
BRQ-VM-64-40	919	1604	460	340	398
BRQ-VM-64-40-2	919	1569	400	310	336
BRQ-VM-64-50-2	1001	1686	460	340	402
BRQ-VM-90-10	571	1071	330	255	188
BRQ-VM-90-20	773	1423	400	310	304
BRQ-VM-90-20-1	773	1348	360	285	248
BRQ-VM-90-20-2	773	1323	330	255	211
BRQ-VM-90-30-2	865	1515	400	310	330
BRQ-VM-120-10	840	1390	330	255	250
BRQ-VM-120-10-1	840	1330	330	255	235

Installation dimensions

Dimensions in mm

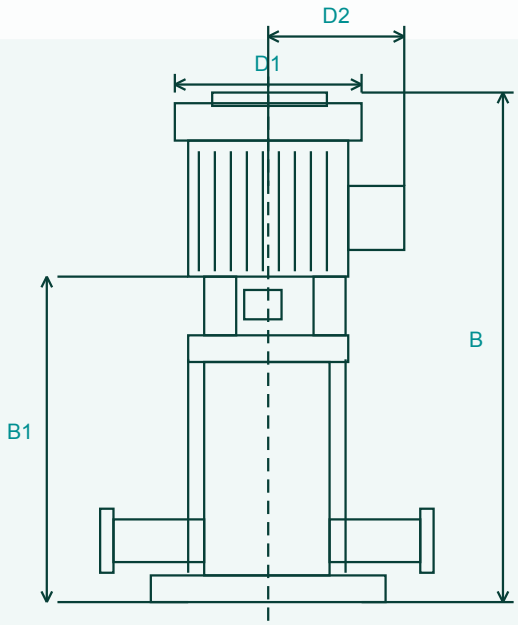

Inline connections

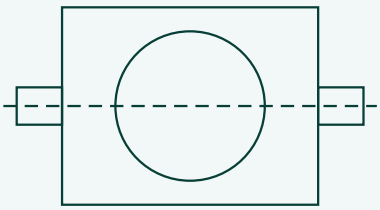


Model / size	B1	B	D1	D2	kg
BRQ-VM-120-20	1000	1660	400	310	380
BRQ-VM-120-20-1	1000	1660	400	310	350
BRQ-VM-120-20-2	1000	1660	400	310	350
BRQ-VM-120-30-1	1160	1860	460	340	445
BRQ-VM-120-40	1350	2195	580	410	675
BRQ-VM-120-40-1	1350	2195	580	410	675
BRQ-VM-120-40-2	1350	2195	580	410	675
BRQ-VM-120-50-2	1510	2355	580	410	690
BRQ-VM-150-10	840	1430	360	285	280
BRQ-VM-150-10-1	840	1330	330	255	235
BRQ-VM-150-20	1000	1700	460	340	435
BRQ-VM-150-20-1	1000	1660	400	310	380
BRQ-VM-150-20-2	1000	1660	400	310	360
BRQ-VM-150-30	1190	2035	580	410	665
BRQ-VM-150-30-1	1190	2035	580	410	665
BRQ-VM-150-30-2	1190	1960	510	370	545
BRQ-VM-150-40-2	1350	2195	580	410	680


BRQ-VM / STAINLESS VERTICAL MULTISTAGE

Installation dimensions

Dimensions in mm

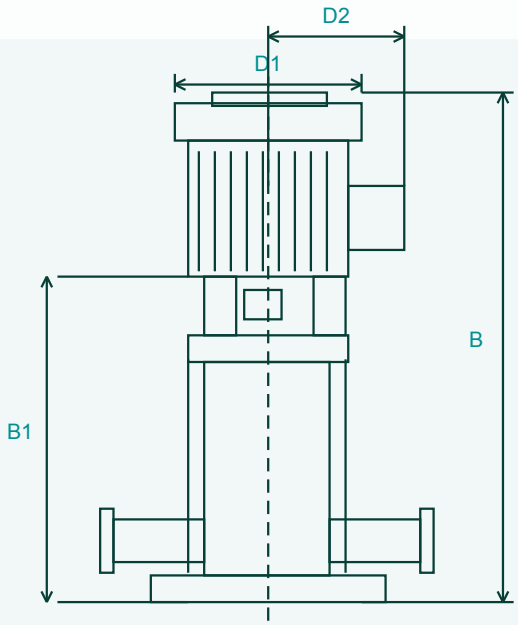

Inline connections

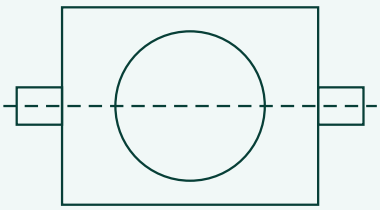

Model / size	B1	B	D1	D2	kg
BRQ-VM-200-10	907	1607	450	345	484
BRQ-VM-200-20	1131	2465	580	410	787